KRX


Flashing lights



Elegant form and technological innovation

- Sleek design and high-quality materials for a flashing light that offers much more than simple light alerts.
- Unique model with universal power supply from 24 V AC - DC to 230 V AC.
- With white dome.
- Integrated double antenna (433.92 MHz and 868.35 MHz).
- Wall-mounted bracket that solves every installation.
- CXN BUS technology, with built-in gateway, for light signaling management via AppSetup.

Dimensions (mm)

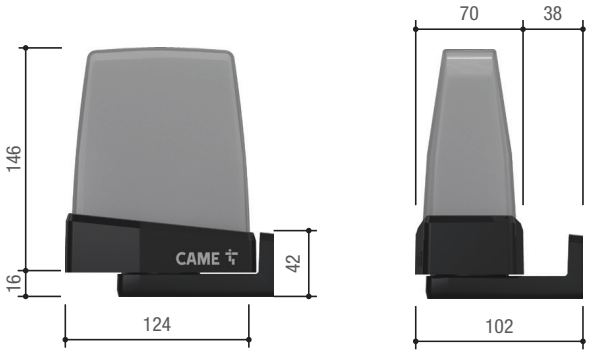

Technical characteristics

MODELS	806LA-0070
Protection rating (IP)	54
Power supply (V)	CXN BUS
Radio signal frequency (Mhz)	433 and 868
Battery type	-
Operating temperature (°C)	-20 ÷ +55
Material	ABS - Polycarbonate - PMMA