
806SL-0330

Transponder sensor

CONNECT

CXN BUS

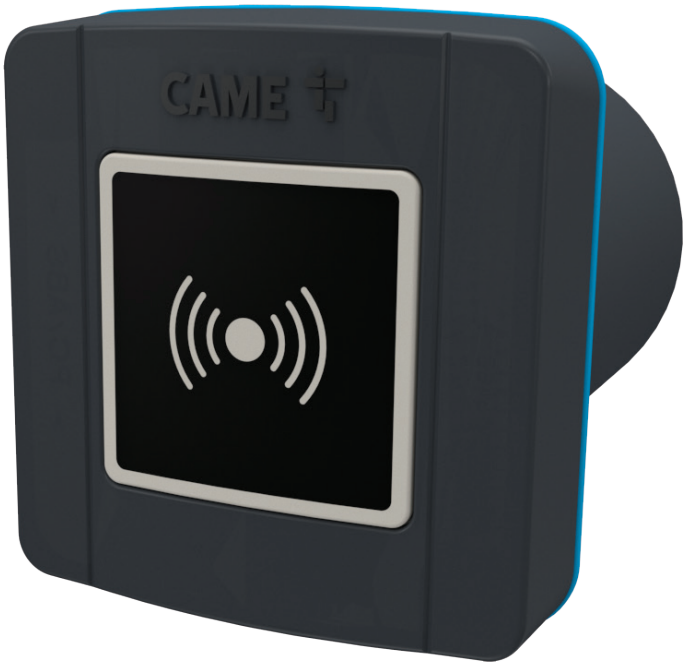

Recess mounted transponder sensor

- SELR2BDG - Recess-mounted BUS CXN transponder selector for cards, keyfobs and TAG (MiFare protocol)
- Blue blacklighting
- RAL7024 grey colour

Dimensions (mm)



Dimensions table (mm)

Models	B (mm)	H (mm)	P (mm)	Q (mm)	P + Q (mm)
806SL-0310	70.5	73.5	76	16.5	92.5

Technical characteristics

MODELS	806SL-0330
Protection rating (IP)	54
Power supply (V)	12 - 24 AC - DC
Radio signal frequency (Mhz)	-
Power (W)	0.35
Battery type	-
Battery capacity (mAh)	-
Max. rating of 24 V (A) relay contacts	-
Operating temperature (°C)	-20 ÷ +55
Material	-

● 12 - 24 V AC - DC