TOPD2FPS


Radio command at 433.92 and 868.35 Mhz fixed code



Double-frequency solution with fixed code

- Manages several operators on different frequencies.
- One device to manage two frequencies, that is, 433.92 MHz and 868.35 MHz.
- Uses only one CR2032 battery.
- Flat battery alert
- No setting required when selecting the frequency
- Two-channel version.
- Surface-mounted receiver modules 806RV-0010 and 806RV-0020 - CAME KEY compatible.

Dimensions (mm)

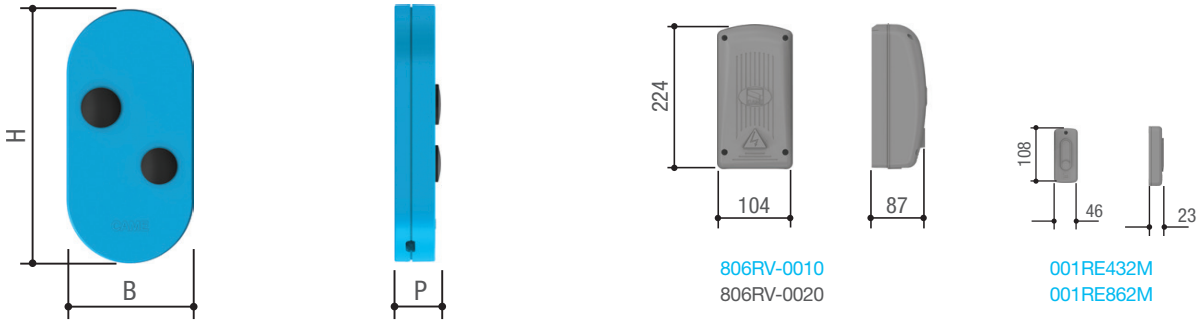

806RV-0010
806RV-0020

001RE432M
001RE862M

Operational limits

MODELS	806TS-0095
Max. range of radio (m)	50 ÷ 150

Technical characteristics

MODELS	806TS-0095
Combinations	4.096 - 16.777.216
Radio signal frequency (Mhz)	433,92 - 868,35
Operating temperature (°C)	-20 ÷ +55
Material	POLYCARBONATE