LHS & AGT

ENTRY PANEL RECEIVER




CONTENTS

- LHS Video Panel
- Front piece with one to four buttons
- X1 control module and power supply
- Video receiver with handset
- Maximum cable distance 100m

IP54 IK09 CABLE P169 DIAGRAM

KITS


Buttons/Way	Mounting	Kit Code	
1 WAY	Surface	**LHAGV1**	
2 WAY	Surface	**LHAGV2**	
3 WAY	Surface	**LHAGV3**	
4 WAY	Surface	**LHAGV4**	



RECESS MOUNTING BACK BOX & FRAME
Back box and frame for flush mounting the LHS.

Item	Description	Code	
AGT Video	Intercom video handset	**AGT V (840CF-0020)**	
Mounting Frame*	Frame for recess mounted LHS	**LHS CI (840XC-0330)**	
Back Box*	Back box for recess mounted LHS	**LSI (60090640)**	
Rain Cover	Cover for surface mounted LHS	**840XC-0340**	

*Note - To recess mount LHS panel, both LHS CI and LSI are required.




RAIN COVER
Optional extra for surface mounted LHS.





LHS dimensions.



AGT V

HANDSET VIDEO INTERCOM WITH SOFT-TOUCH BUTTONS, 5" LCD DISPLAY, WHITE

COMPATIBLE SYSTEMS



TECHNICAL DATA

Dimensions (mm)	205 x 190 x 44.5
Power supply by BUS (V)	15 ÷ 20 DC
Absorption by BUS (mA)	175
Consumption in stand-by mode (mA)	<1
Operating temperature (°C)	+5 ÷ +40
Protection rating (IP)	30
Video standard	PAL/NTSC
Display	5" TFT LCD
Colour	White

Wall monitor with 5″ colour LCD display equipped with OSD for adjusting video parameters (brightness, colour, contrast). The 4 main touch buttons are used to manage the primary functions such as door opening, self-insertion of entry panel videos, ringtone adjustment/exclusion (with signaling LED when excluded) and the sending of a programmable auxiliary control. It allows manging the "gate opener" function and displays the status of the gate controlled by means of a signaling LED. It includes a bracket for wall mounting on horizontal or vertical 503 box and on Ø60 mm round box.

FEATURES

- 5" color display with OSD
- Handset with magnetic hang-up
- Concealed LED signal
- Soft-touch buttons
- Program melodies depending on the type of call
- Display colour, brightness and contrast adjustment via OSD
- Adjust/exclude ringtone, with alert LED when set to exclude mode
- UX2 for auxiliary functions and call to the porter
- Latch function (gate opener) for checking the status of external automations
- Automatic door-opener function

ACCESSORIES



AGT KTV

Desktop stand. Plexiglass 10mm thick stand supplied with white RJ45 cable and terminal board cover with PMMA laminate - metallic grey

DIMENSIONS






CAME

LHS

RESIDENTIAL ENTRY PANELS

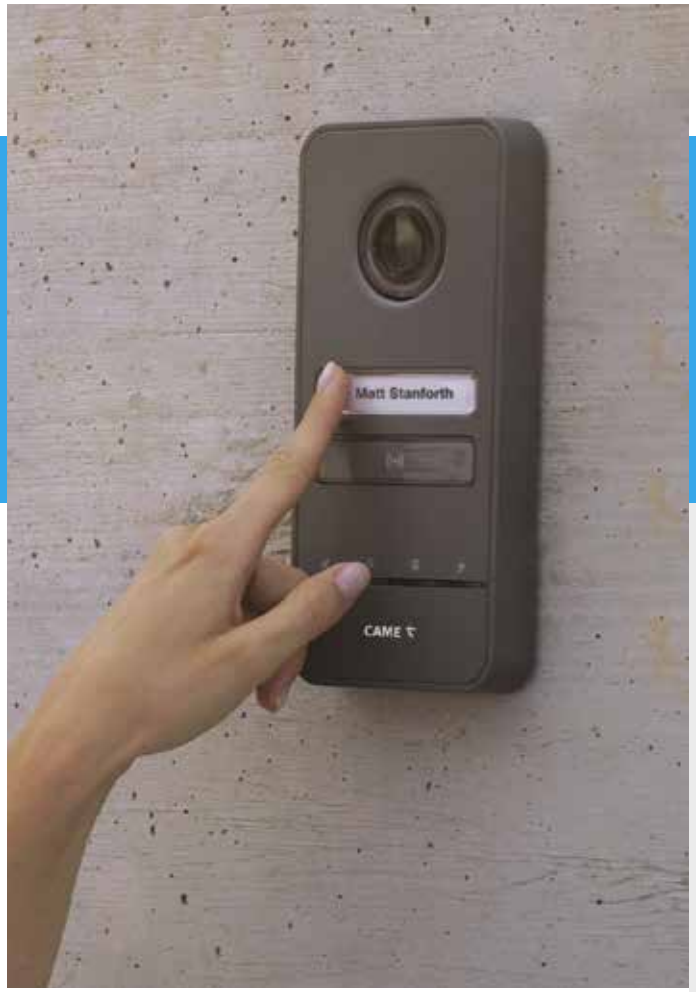

COMPATIBLE SYSTEMS

LHS is the ideal video entry panel for single homes or small apartment blocks, using the X1 system, with the option of 1 to 4 call buttons.

This product has been developed with particular attention to durability, vandal resistance and reliability, with an all-metal structure and new electronic functionality.

Flush mount installation
Thickness 13 mm

Surface mount installation
Thickness 64 mm


Audio only version

Video version


Water and dust protection rating
IP54

Impact resistance rating
IK09

VIEWING ANGLE

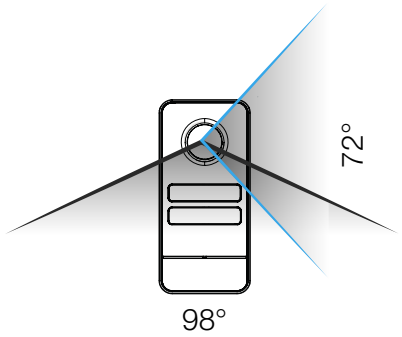

DIMENSIONS

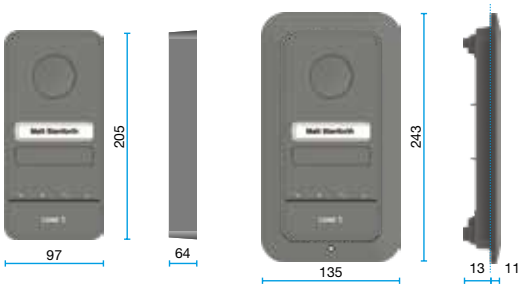

Surface mounted

Flush-mounted

FEATURES

Vandal resistant Zamak casing

Unique design for single homes or small apartment blocks

Available with 1 to 4 call buttons

PLUS version contains Bluetooth technology for use with smartphone App and RFID module for key fob access control

Wide angle camera on video version

Modern LED indicators delicately demonstrate the system status

Easily configured via smartphone



VIDEO





AUDIO

LHS V/01 PLUS

- Main die-cast Zamak body
- Wide-angle camera 98° 728 x 560 px
- 125 kHz RFID sensor for management of up to 40 users
- Bluetooth® module for control via smartphone

LHS V/01

- Main die-cast Zamak body
- Wide-angle camera 98° 728 x 560 px

LHS A/01

- Main die-cast Zamak body
- Microphone



ACCESS CONTROL VIA RFID

LHS Plus is fitted with an integrated RFID reader.
By placing an RFID-enabled key fob on the reader, users can open an electric lock, activate an automation or control auxiliary relays.

ACCESS CONTROL VIA BLUETOOTH

LHS Plus incorporates a Bluetooth® module for connecting to your smartphone or tablet using the Automation BT App, enabling easy remote access.

By setting the automatic opening function, it is possible for the app to open the electric lock or activate the automation as soon as the user approaches the door entry system, without having to touch the smartphone (Apple smartphones only).

LHS can accommodate up to 40 different users, meaning you get a 'mini' access control system exclusively inside your door entry panel at no extra cost.

UP TO 40 USERS

CAME

AUTOMATION BT APP

App available on Google Play and App store for remote management.

