MTM STANDARD & AGT

ENTRY PANEL WITH PROXIMITY READER HOUSING

RECEIVER



Surface kit shown - includes rainshield


CONTENTS

- Audio-video module for X1 System
- Front piece for module with one to ten buttons and proximity reader housing*
- Frame with two- or three-module profile
- X1 control module and power supply
- Video receiver with handset
- Maximum cable distance 100m


IP54 IK07 CABLE P170 DIAGRAM

KITS

Buttons/Way	Mounting	Modules	Kit Code	
1 WAY	Flush	2	MTMFPAGV1	
	Surface		**MTMSPAGV1**	
2 WAY	Flush		MTMFPAGV2D	
	Surface		**MTMSPAGV2D**	
3 WAY	Flush	3	MTMFPAGV3	
	Surface		**MTMSPAGV3**	
4 WAY	Flush		MTMFPAGV4	
	Surface		**MTMSPAGV4**	
5 WAY	Flush		MTMFPAGV5	
	Surface		**MTMSPAGV5**	
6 WAY	Flush		MTMFPAGV6D	
	Surface		**MTMSPAGV6D**	
7 WAY	Flush		MTMFPAGV7D	
	Surface		**MTMSPAGV7D**	
8 WAY	Flush		MTMFPAGV8D	
	Surface		**MTMSPAGV8D**	
9 WAY	Flush		MTMFPAGV9D	
	Surface		**MTMSPAGV9D**	
10 WAY	Flush		MTMFPAGV10D	
	Surface		**MTMSPAGV10D**	



FLUSH KITS
Include back box.




SURFACE KITS
Include rainshield.

Item	Description	Code	
AGT Video	Intercom video handset	**AGT V (840CF-0020)**	

*Reader not included. Accepts most manufacturers panel mount proximity readers.







MTM

THE RANGE OF EXTERNAL MODULAR ENTRY PANELS

COMPATIBLE SYSTEMS







DIGITAL DIALING

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users, a scrolling list or an alphabetical block search.

BUTTON COMPOSITION

On the call module, you can customise the amount of buttons required. Using a variety of modular front plates you can achieve maximum button composition flexibility. Available with 2, 3, 4 and 8 button front plates.

ACCESS CONTROL

The MTM range also includes 2 modules specifically for access control, one that is keypad operated and the other RDIF reader operated. Both modules are fitted with 2 on-board relay switches and 2 inputs for directly activating the relay switches.


MTM has an extensive range of modular configurations, that are compatible with five different systems, allowing multiple functions to be carried out.

It's clean design has strong aesthetic appeal in all installation scenarios, while maintaining simple functionality.

Particular attention to detail has been paid to the finish, by eliminating the speaker holes, backlighting the keypad to give
it a sleek look, and using satin aluminium for durability.

IK07


VISUAL ANGLE

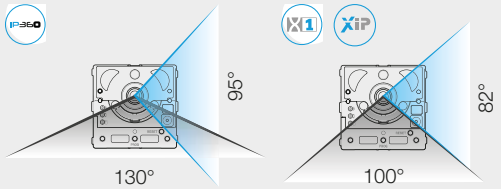

FEATURES

- Anodised and frosted natural aluminum finish
- Unique design without typical speaker holes
- Direct connection of an analogue camera (audio X1)
- High efficiency illuminator with anti-dazzle diffuser
- Acoustic and visual signals
- HD resolution (IP Camera version only) and HDR technology (High Dynamic Range)
- Backlighting of blue or white label holders with intensity adjustment
- Front mini USB for firmware updates and programming
- Up to 98 call buttons and unlimited digital calls

DIMENSIONS

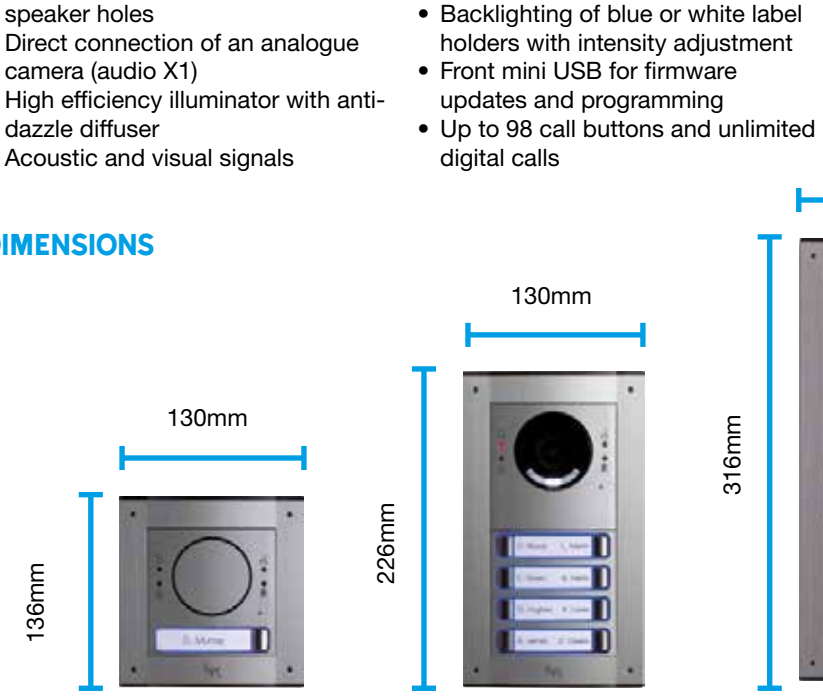

CAME

AGT V

HANDSET VIDEO INTERCOM WITH SOFT-TOUCH BUTTONS, 5" LCD DISPLAY, WHITE

COMPATIBLE SYSTEMS



TECHNICAL DATA

Dimensions (mm)	205 x 190 x 44.5
Power supply by BUS (V)	15 ÷ 20 DC
Absorption by BUS (mA)	175
Consumption in stand-by mode (mA)	<1
Operating temperature (°C)	+5 ÷ +40
Protection rating (IP)	30
Video standard	PAL/NTSC
Display	5" TFT LCD
Colour	White

Wall monitor with 5″ colour LCD display equipped with OSD for adjusting video parameters (brightness, colour, contrast). The 4 main touch buttons are used to manage the primary functions such as door opening, self-insertion of entry panel videos, ringtone adjustment/exclusion (with signaling LED when excluded) and the sending of a programmable auxiliary control. It allows manging the "gate opener" function and displays the status of the gate controlled by means of a signaling LED. It includes a bracket for wall mounting on horizontal or vertical 503 box and on Ø60 mm round box.

FEATURES

- 5" color display with OSD
- Handset with magnetic hang-up
- Concealed LED signal
- Soft-touch buttons
- Program melodies depending on the type of call
- Display colour, brightness and contrast adjustment via OSD
- Adjust/exclude ringtone, with alert LED when set to exclude mode
- UX2 for auxiliary functions and call to the porter
- Latch function (gate opener) for checking the status of external automations
- Automatic door-opener function

ACCESSORIES



AGT KTV

Desktop stand. Plexiglass 10mm thick stand supplied with white RJ45 cable and terminal board cover with PMMA laminate - metallic grey

DIMENSIONS





CAME