# MTM STANDARD & XTS 5IP

## ENTRY PANEL WITH PROXIMITY READER HOUSING & DIGITAL DISPLAY RECEIVER



Surface kit shown - includes rainshield
Phone not included.
Shown for illustrative purposes only.

## CONTENTS

- Audio-video module for IP360 System
- Front piece for module with proximity reader housing* and digital display
- Frame with three module profile
- Video receiver with 5" colour LCD display




IP54 IK07 CABLE P171 DIAGRAM


## KITS

| Buttons/Way | Mounting | Modules | Kit Code ● Receiver | Kit Code ○ Receiver | |
|---|---|---|---|---|---|
| 1 WAY | Flush | 3 | MTMFPDIP5B1 | MTMFPDIP5W1 | |
| | Surface | | **MTMSPDIP5B1** | **MTMSPDIP5W1** | |
| 2 WAY | Flush | | MTMFPDIP5B2 | MTMFPDIP5W2 | |
| | Surface | | **MTMSPDIP5B2** | **MTMSPDIP5W2** | |
| 3 WAY | Flush | | MTMFPDIP5B3 | MTMFPDIP5W3 | |
| | Surface | | **MTMSPDIP5B3** | **MTMSPDIP5W3** | |
| 4 WAY | Flush | | MTMFPDIP5B4 | MTMFPDIP5W4 | |
| | Surface | | **MTMSPDIP5B4** | **MTMSPDIP5W4** | |
| 5 WAY | Flush | | MTMFPDIP5B5 | MTMFPDIP5W5 | |
| | Surface | | **MTMSPDIP5B5** | **MTMSPDIP5W5** | |
| 6 WAY | Flush | | MTMFPDIP5B6 | MTMFPDIP5W6 | |
| | Surface | | **MTMSPDIP5B6** | **MTMSPDIP5W6** | |
| 7 WAY | Flush | | MTMFPDIP5B7 | MTMFPDIP5W7 | |
| | Surface | | **MTMSPDIP5B7** | **MTMSPDIP5W7** | |
| 8 WAY | Flush | | MTMFPDIP5B8 | MTMFPDIP5W8 | |
| | Surface | | **MTMSPDIP5B8** | **MTMSPDIP5W8** | |
| 9 WAY | Flush | | MTMFPDIP5B9 | MTMFPDIP5W9 | |
| | Surface | | **MTMSPDIP5B9** | **MTMSPDIP5W9** | |
| 10 WAY | Flush | | MTMFPDIP5B10 | MTMFPDIP5W10 | |
| | Surface | | **MTMSPDIP5B10** | **MTMSPDIP5W10** | |

| Item | Description | Code ● Receiver | Code ○ Receiver | |
|---|---|---|---|---|
| XTS 5 B/W | Full touch video intercom | **XTS/5IP BK** | **XTS/5IP WH** | |



**FLUSH KITS**
Include back box.




**SURFACE KITS**
Include rainshield.




**COLOURS**
Available in black and white

*Reader not included. Accepts most manufacturers panel mount proximity readers.







# MTM

## THE RANGE OF EXTERNAL MODULAR ENTRY PANELS

**COMPATIBLE SYSTEMS**







### DIGITAL DIALING

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users, a scrolling list or an alphabetical block search.

### BUTTON COMPOSITION

On the call module, you can customise the amount of buttons required. Using a variety of modular front plates you can achieve maximum button composition flexibility. Available with 2, 3, 4 and 8 button front plates.

### ACCESS CONTROL

The MTM range also includes 2 modules specifically for access control, one that is keypad operated and the other RDIF reader operated. Both modules are fitted with 2 on-board relay switches and 2 inputs for directly activating the relay switches.


MTM has an extensive range of modular configurations, that are compatible with five different systems, allowing multiple functions to be carried out.

It's clean design has strong aesthetic appeal in all installation scenarios, while maintaining simple functionality.

Particular attention to detail has been paid to the finish, by eliminating the speaker holes, backlighting the keypad to give
it a sleek look, and using satin aluminium for durability.

IK07


### VISUAL ANGLE

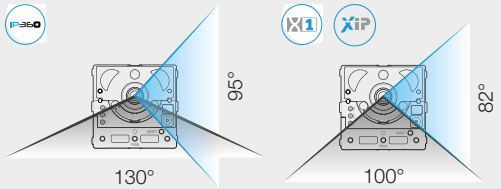


## FEATURES

- Anodised and frosted natural aluminum finish
- Unique design without typical speaker holes
- Direct connection of an analogue camera (audio X1)
- High efficiency illuminator with anti-dazzle diffuser
- Acoustic and visual signals
- HD resolution (IP Camera version only) and HDR technology (High Dynamic Range)
- Backlighting of blue or white label holders with intensity adjustment
- Front mini USB for firmware updates and programming
- Up to 98 call buttons and unlimited digital calls

## DIMENSIONS

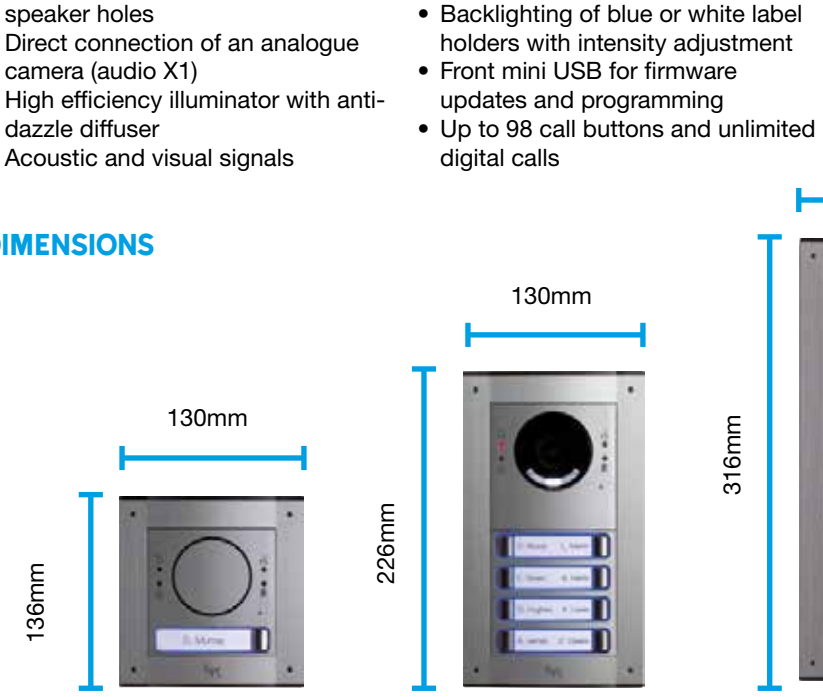


CAME

# XTS/5IP WH

**HANDSFREE 5" VIDEO ENTRY SYSTEM FOR IP360 SYSTEMS. WHITE.**

**COMPATIBLE SYSTEMS**

IP360



## TECHNICAL DATA


| | |
|---|---|
| Dimensions (mm) | 138 x 98 x 24 |
| Local power supply (V) | 14 ÷ 18 DC |
| PoE power supply | IEEE 802.3af-PD |
| Consumption in stand-by mode (mA) | 270 |
| Max. absorption (mA) | 330 |
| Operating temperature (°C) | 0 ÷ +40 |
| Protection rating (IP) | 30 |
| Video standard | H.264 |
| Colour | White |

Surface mounted monitor with 5˝ TFT touch screen display with Optical Bonding technology. User interface for managing video intercom functions, intercom calls, video-messaging, and text messaging. It uses SIP protocol and G711 audio codec and H.264 video codec. RJ45 port for network, PoE or local connection. On-board web server for configuring and updating firmware. It includes bracket for surface mounting on 503 box (horizontal) and Ø 60 mm round box. Ready for flush mounting with dedicated box. Compatible with IP360 system.

## FEATURES

- Full-duplex audio speakerphone
- 5˝ TFT display Full touch-screen with Optical Bonding anti-glare technology for enhanced readability in brightly lit settings
- RJ45 port for directly connecting to the Ethernet
- Local or PoE (Powered over Ethernet) power supply
- Customizable user interface with UI Creator software
- Configurable quick controls (default main entrance door-opener)
- List of AUX commands for activating auxiliary functions
- “Panic” function for emergency calls to the porter (if present on the system)
- Audio video settings: ringtone volume, display brightness, interface backgrounds
- Different ringtones for entry panels and landings
- Exclude ringtone key (the alert LED lights up when silenced)
- Self-inserting video of entry panels with cyclic selection
- Unlimited calls to other receivers and smartphones and tablets
- Contacts list and favorites list
- Video answering service, stores up to 100, 10-second audio and video messages.
- Audio and video recording during conversations
- Sending and receiving text messages from the porter
- Live feeds of the connected IP video cameras
- Business function: for automatic door opening during business hours
- Block display function for cleaning
- Standard SIP protocol, H.264 video codec, G711 audio codec
- On-board web server for configuring and managing via the browser

## DIMENSIONS

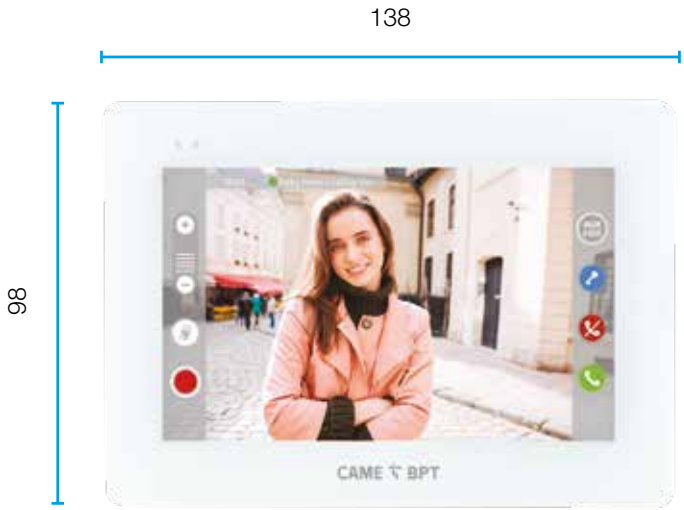


CAME