MTM STANDARD & XTS 7IP

ENTRY PANEL WITH PROXIMITY READER HOUSING & DIGITAL DISPLAY

RECEIVER

WiFi COMPATIBLE



Surface kit shown - includes rainshield
Phone not included.
Shown for illustrative purposes only.

CONTENTS


- Audio-video module for IP360 System
- Front piece for module with proximity reader housing* and digital display
- Frame with three module profile
- Video receiver with 7" colour LCD display
- Video call via app to 4 iOS or Android devices

IP54 IK07 CABLE P171 DIAGRAM


KITS

Buttons/Way	Mounting	Modules	Kit Code ● Receiver	Kit Code ○ Receiver	
1 WAY	Flush	3	MTMFPDIP7B1	MTMFPDIP7W1	
	Surface		**MTMSPDIP7B1**	**MTMSPDIP7W1**	
2 WAY	Flush		MTMFPDIP7B2	MTMFPDIP7W2	
	Surface		**MTMSPDIP7B2**	**MTMSPDIP7W2**	
3 WAY	Flush		MTMFPDIP7B3	MTMFPDIP7W3	
	Surface		**MTMSPDIP7B3**	**MTMSPDIP7W3**	
4 WAY	Flush		MTMFPDIP7B4	MTMFPDIP7W4	
	Surface		**MTMSPDIP7B4**	**MTMSPDIP7W4**	
5 WAY	Flush		MTMFPDIP7B5	MTMFPDIP7W5	
	Surface		**MTMSPDIP7B5**	**MTMSPDIP7W5**	
6 WAY	Flush		MTMFPDIP7B6	MTMFPDIP7W6	
	Surface		**MTMSPDIP7B6**	**MTMSPDIP7W6**	
7 WAY	Flush		MTMFPDIP7B7	MTMFPDIP7W7	
	Surface		**MTMSPDIP7B7**	**MTMSPDIP7W7**	
8 WAY	Flush		MTMFPDIP7B8	MTMFPDIP7W8	
	Surface		**MTMSPDIP7B8**	**MTMSPDIP7W8**	
9 WAY	Flush		MTMFPDIP7B9	MTMFPDIP7W9	
	Surface		**MTMSPDIP7B9**	**MTMSPDIP7W9**	
10 WAY	Flush		MTMFPDIP7B10	MTMFPDIP7W10	
	Surface		**MTMSPDIP7B10**	**MTMSPDIP7W10**	

Item	Description	Code ● Receiver	Code ○ Receiver	
XTS 7 B/W	Full touch video intercom	**XTS/7IP BK WIFI**	**XTS/7IP WH WIFI**	



FLUSH KITS
Include back box.




SURFACE KITS
Include rainshield.




COLOURS
Available in black and white

*Reader not included. Accepts most manufacturers panel mount proximity readers.







MTM

THE RANGE OF EXTERNAL MODULAR ENTRY PANELS

COMPATIBLE SYSTEMS







DIGITAL DIALING

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users, a scrolling list or an alphabetical block search.

BUTTON COMPOSITION

On the call module, you can customise the amount of buttons required. Using a variety of modular front plates you can achieve maximum button composition flexibility. Available with 2, 3, 4 and 8 button front plates.

ACCESS CONTROL

The MTM range also includes 2 modules specifically for access control, one that is keypad operated and the other RDIF reader operated. Both modules are fitted with 2 on-board relay switches and 2 inputs for directly activating the relay switches.


MTM has an extensive range of modular configurations, that are compatible with five different systems, allowing multiple functions to be carried out.

It's clean design has strong aesthetic appeal in all installation scenarios, while maintaining simple functionality.

Particular attention to detail has been paid to the finish, by eliminating the speaker holes, backlighting the keypad to give
it a sleek look, and using satin aluminium for durability.

IK07


VISUAL ANGLE

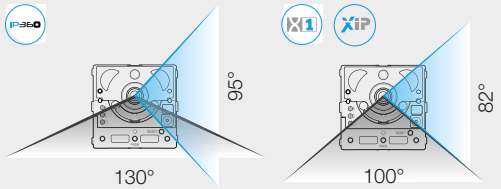

FEATURES

- Anodised and frosted natural aluminum finish
- Unique design without typical speaker holes
- Direct connection of an analogue camera (audio X1)
- High efficiency illuminator with anti-dazzle diffuser
- Acoustic and visual signals
- HD resolution (IP Camera version only) and HDR technology (High Dynamic Range)
- Backlighting of blue or white label holders with intensity adjustment
- Front mini USB for firmware updates and programming
- Up to 98 call buttons and unlimited digital calls

DIMENSIONS

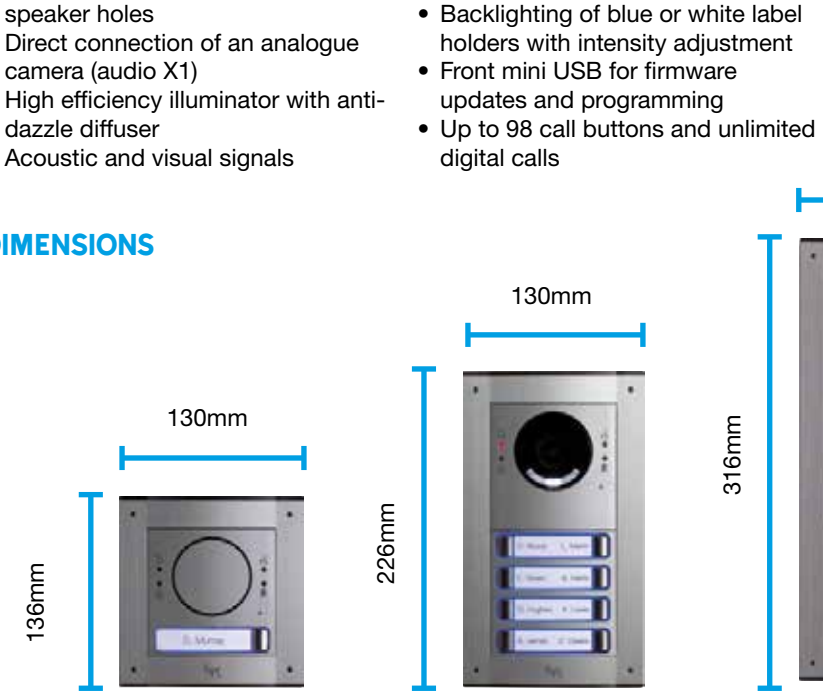

CAME

XTS 7 IP BK WIFI

HANDSFREE 7" VIDEO ENTRY SYSTEM FOR IP360 SYSTEMS. BLACK.

COMPATIBLE SYSTEMS

IP360



TECHNICAL DATA


Dimensions (mm)	185 x 129 x 24
Local power supply (V)	14 ÷ 18 DC
PoE power supply	IEEE 802.3af-PD
Consumption in stand-by mode (mA)	340
Max. absorption (mA)	420
Operating temperature (°C)	0 ÷ +40
Protection rating (IP)	30
Video standard	H.264
Frequency (MHz)	2.412 - 2.472
Wireless Standard	IEEE 802.11b/g/n
Colour	Black

Surface mounted monitor with 7″ TFT touch-screen display with Optical Bonding technology, integrated WiFi for remote calls on smartphones running the dedicated app. User interface for managing video intercom unctions, intercom calls, video-messaging, and text messaging. It uses SIP protocol and G711 audio codec and H.264 video codec. RJ45 port for network, PoE or local connection. On-board web server for configuring and updating firmware. It includes bracket for surface mounting on 503 box (horizontal) and Ø 60 mm round box. Ready for flush mounting with dedicated box. Compatible with IP360 system.

FEATURES

- Full-duplex audio speakerphone
- 5″ TFT display Full touch-screen with Optical Bonding anti-glare technology for enhanced readability in brightly lit settings
- RJ45 port for directly connecting to the Ethernet
- Local or PoE (Powered over Ethernet) power supply
- Customizable user interface with UI Creator software
- Configurable quick controls (default main entrance door-opener)
- List of AUX commands for activating auxiliary functions
- "Panic" function for emergency calls to the porter (if present on the system)
- Audio video settings: ringtone volume, display brightness, interface backgrounds
- Different ringtones for entry panels and landings
- Exclude ringtone key (the alert LED lights up when silenced)
- Self-inserting video of entry panels with cyclic selection
- Unlimited calls to other receivers and smartphones and tablets
- Contacts list and favorites list
- Video answering service, stores up to 100, 10-second audio and video messages.
- Audio and video recording during conversations
- Sending and receiving text messages from the porter
- Live feeds of the connected IP video cameras
- Business function: for automatic door opening during business hours
- Block display function for cleaning
- Standard SIP protocol, H.264 video codec, G711 audio codec
- On-board web server for configuring and managing via the browser

DIMENSIONS

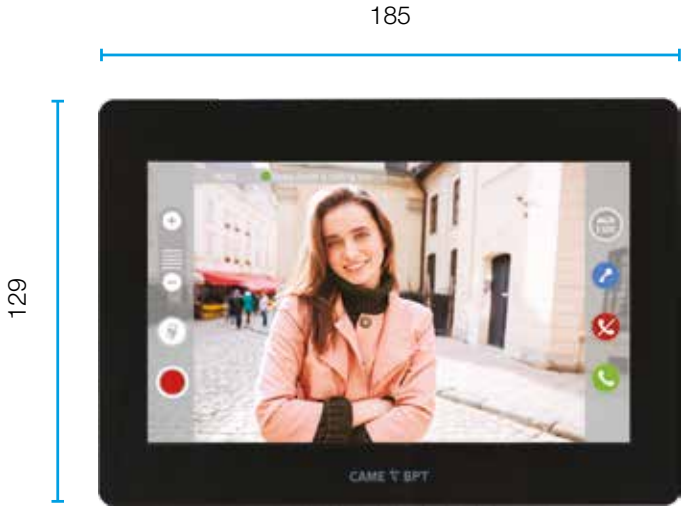

CAME