MTM VR ZAMAK & AGT

ENTRY PANEL WITH PROXIMITY READER HOUSING

RECEIVER



Surface kit shown - includes rainshield


CONTENTS

- Audio-video module for X1 System
- Front piece for module with one to ten buttons and proximity reader housing*
- Frame with two- or three-module profile
- X1 control module and power supply
- Video receiver with handset
- Maximum cable distance 100m


IP54 IK09 CABLE P170 DIAGRAM

KITS

Buttons/Way	Mounting	Modules	Kit Code	
1 WAY	Flush	2	MTMFVRPAGV1	
	Surface		**MTMSVRPAGV1**	
2 WAY	Flush		MTMFVRPAGV2D	
	Surface		**MTMSVRPAGV2D**	
3 WAY	Flush	3	MTMFVRPAGV3	
	Surface		**MTMSVRPAGV3**	
4 WAY	Flush		MTMFVRPAGV4	
	Surface		**MTMSVRPAGV4**	
5 WAY	Flush		MTMFVRPAGV5	
	Surface		**MTMSVRPAGV5**	
6 WAY	Flush		MTMFVRPAGV6D	
	Surface		**MTMSVRPAGV6D**	
7 WAY	Flush		MTMFVRPAGV7D	
	Surface		**MTMSVRPAGV7D**	
8 WAY	Flush		MTMFVRPAGV8D	
	Surface		**MTMSVRPAGV8D**	
9 WAY	Flush		MTMFVRPAGV9D	
	Surface		**MTMSVRPAGV9D**	
10 WAY	Flush		MTMFVRPAGV10D	
	Surface		**MTMSVRPAGV10D**	



FLUSH KITS
Include back box.




SURFACE KITS
Include rainshield.

Item	Description	Code	
AGT Video	Intercom video handset	**AGT V (840CF-0020)**	

*Reader not included. Accepts most manufacturers panel mount proximity readers.







MTM VR

THE RANGE OF EXTERNAL MODULAR ENTRY PANELS

COMPATIBLE SYSTEMS



DIGITAL DIALING

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users, a scrolling list or an alphabetical block search.

BUTTON COMPOSITION

On the call module, you can customise the amount of buttons required. Using a variety of modular front plates you can achieve maximum button composition flexibility. Available with 2, 3, 4 and 8 button front plates.


ACCESS CONTROL

The MTM range also includes 2 modules specifically for access control, one that is keypad operated and the other RDIF reader operated. Both modules are fitted with 2 on-board relay switches and 2 inputs for directly activating the relay switches.

A key feature of MTM VR is the durability and strength of the materials. The modular entry panel does not go unnoticed. It uses the same electronic modules and easy to fit functionality as the standard MTM however, it uses an IK09 rated vandal resistant Zamak composite with crush proof buttons and anti-tamper screws.

IK09


VISUAL ANGLE

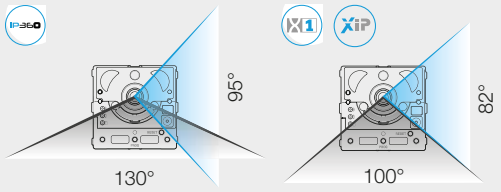

FEATURES

- Zamak finish
- Direct connection to an analogue camera (X1 audio)
- High efficiency illuminator with anti-glare diffuser
- Sound and visual alerts
- HD resolution and High Dynamic Range (HDR) technology
- Blue or white backlit tag holders with brightness settings
- MiniUSB front panel for firmware updating and programming
- Up to 98 button calls and unlimited digital calls

DIMENSIONS

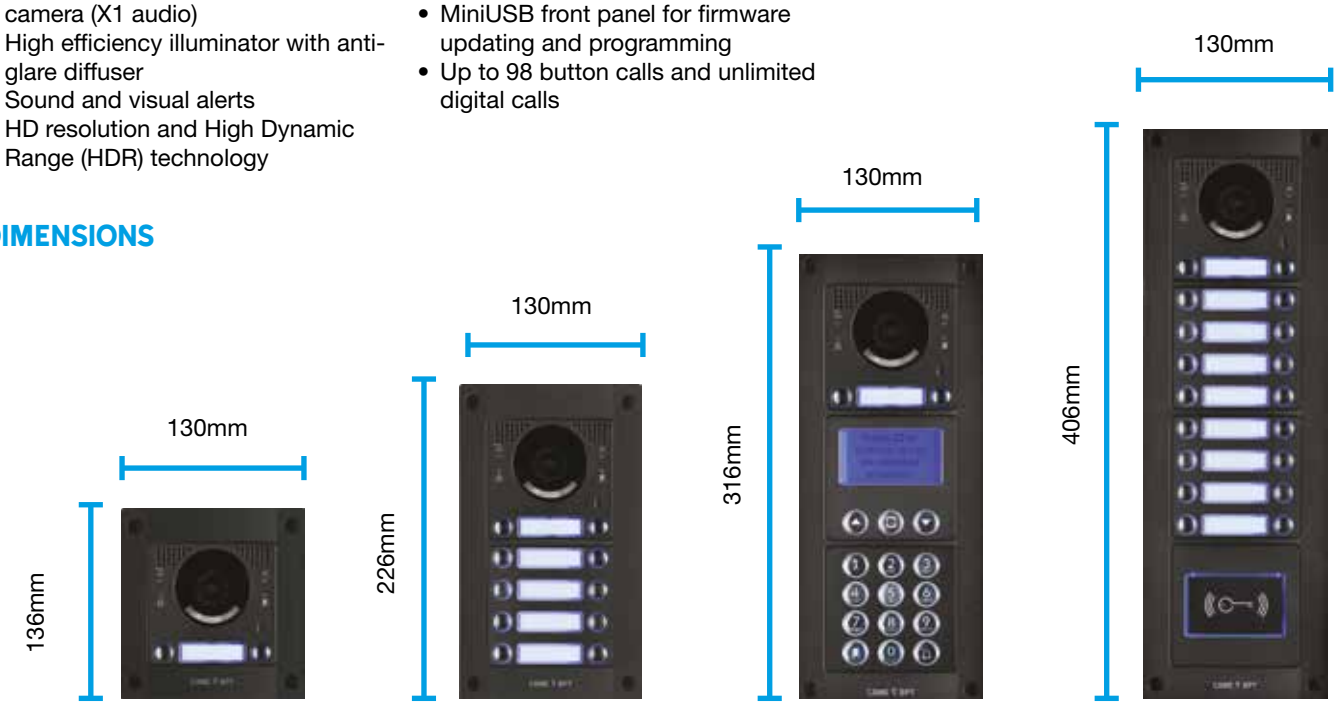

CAME

AGT V

HANDSET VIDEO INTERCOM WITH SOFT-TOUCH BUTTONS, 5" LCD DISPLAY, WHITE

COMPATIBLE SYSTEMS



TECHNICAL DATA

Dimensions (mm)	205 x 190 x 44.5
Power supply by BUS (V)	15 ÷ 20 DC
Absorption by BUS (mA)	175
Consumption in stand-by mode (mA)	<1
Operating temperature (°C)	+5 ÷ +40
Protection rating (IP)	30
Video standard	PAL/NTSC
Display	5" TFT LCD
Colour	White

Wall monitor with 5″ colour LCD display equipped with OSD for adjusting video parameters (brightness, colour, contrast). The 4 main touch buttons are used to manage the primary functions such as door opening, self-insertion of entry panel videos, ringtone adjustment/exclusion (with signaling LED when excluded) and the sending of a programmable auxiliary control. It allows manging the "gate opener" function and displays the status of the gate controlled by means of a signaling LED. It includes a bracket for wall mounting on horizontal or vertical 503 box and on Ø60 mm round box.

FEATURES

- 5" color display with OSD
- Handset with magnetic hang-up
- Concealed LED signal
- Soft-touch buttons
- Program melodies depending on the type of call
- Display colour, brightness and contrast adjustment via OSD
- Adjust/exclude ringtone, with alert LED when set to exclude mode
- UX2 for auxiliary functions and call to the porter
- Latch function (gate opener) for checking the status of external automations
- Automatic door-opener function

ACCESSORIES



AGT KTV

Desktop stand. Plexiglass 10mm thick stand supplied with white RJ45 cable and terminal board cover with PMMA laminate - metallic grey

DIMENSIONS





CAME