MTM STANDARD & AGT

ENTRY PANEL WITH PROXIMITY READER HOUSING

RECEIVER



Surface kit shown - includes rainshield

CONTENTS


- Audio module for System 200
- Front piece for module with one to ten buttons and proximity reader housing*
- Frame with two- or three-module profile
- System 200 control module and power supply
- Audio receiver with handset
- Maximum cable distance 250m

See page 168


IP54 IK07 CABLE P168 DIAGRAM

KITS

Buttons/Way	Mounting	Modules	Kit Code	
1 WAY	Flush	2	MTMFPAGA1	
	Surface		**MTMSPAGA1**	
2 WAY	Flush		MTMFPAGA2D	
	Surface		**MTMSPAGA2D**	
3 WAY	Flush	3	MTMFPAGA3	
	Surface		**MTMSPAGA3**	
4 WAY	Flush		MTMFPAGA4	
	Surface		**MTMSPAGA4**	
5 WAY	Flush		MTMFPAGA5	
	Surface		**MTMSPAGA5**	
6 WAY	Flush		MTMFPAGA6D	
	Surface		**MTMSPAGA6D**	
7 WAY	Flush		MTMFPAGA7D	
	Surface		**MTMSPAGA7D**	
8 WAY	Flush		MTMFPAGA8D	
	Surface		**MTMSPAGA8D**	
9 WAY	Flush		MTMFPAGA9D	
	Surface		**MTMSPAGA9D**	
10 WAY	Flush		MTMFPAGA10D	
	Surface		**MTMSPAGA10D**	



FLUSH KITS
Include back box.




SURFACE KITS
Include rainshield.

Item	Description	Code	
AGT	Intercom handset	**AGT A 200K (840CA-0030)**	

*Reader not included. Accepts most manufacturers panel mount proximity readers.







MTM

THE RANGE OF EXTERNAL MODULAR ENTRY PANELS

COMPATIBLE SYSTEMS







DIGITAL DIALING

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users, a scrolling list or an alphabetical block search.

BUTTON COMPOSITION

On the call module, you can customise the amount of buttons required. Using a variety of modular front plates you can achieve maximum button composition flexibility. Available with 2, 3, 4 and 8 button front plates.

ACCESS CONTROL

The MTM range also includes 2 modules specifically for access control, one that is keypad operated and the other RDIF reader operated. Both modules are fitted with 2 on-board relay switches and 2 inputs for directly activating the relay switches.


MTM has an extensive range of modular configurations, that are compatible with five different systems, allowing multiple functions to be carried out.

It's clean design has strong aesthetic appeal in all installation scenarios, while maintaining simple functionality.

Particular attention to detail has been paid to the finish, by eliminating the speaker holes, backlighting the keypad to give
it a sleek look, and using satin aluminium for durability.

IK07


VISUAL ANGLE

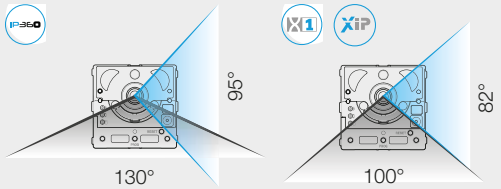

FEATURES

- Anodised and frosted natural aluminum finish
- Unique design without typical speaker holes
- Direct connection of an analogue camera (audio X1)
- High efficiency illuminator with anti-dazzle diffuser
- Acoustic and visual signals
- HD resolution (IP Camera version only) and HDR technology (High Dynamic Range)
- Backlighting of blue or white label holders with intensity adjustment
- Front mini USB for firmware updates and programming
- Up to 98 call buttons and unlimited digital calls

DIMENSIONS

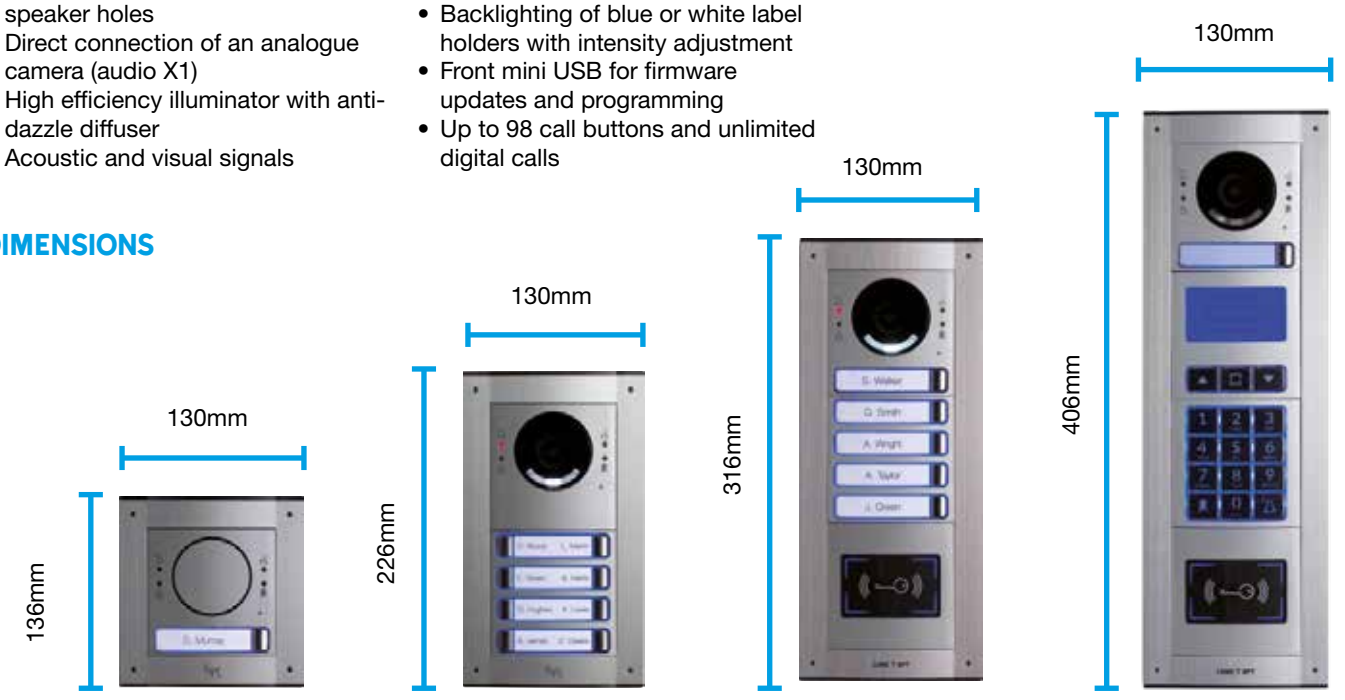

CAME

AGT A

HANDSET INTERCOM WITH SOFT-TOUCH BUTTONS, 1 PROGRAMMABLE AUX BUTTON, WHITE.

COMPATIBLE SYSTEMS



TECHNICAL DATA

Dimensions (mm)	116 x 190 x 44.5
Power supply by BUS (V)	15 ÷ 20 DC
Absorption by BUS (mA)	30
Consumption in stand-by mode (mA)	<0,5
Operating temperature (°C)	+5 ÷ +40
Protection rating (IP)	30
Colour	White

Wall-mounted intercom with 3 main soft-touch buttons for door opening, programmable auxiliary control and ringtone adjustment/ exclusion (with signaling LED when excluded). It allows manging the “gate opener” function and displays the status of the gate controlled by means of a signaling LED. Prearranged for wall installation on horizontal and vertical 503 box and on round Ø 60 mm box.

FEATURES

- Handset with magnetic hang-up
- Concealed LED signal
- AUX2 for auxiliary functions and call to the porter
- Automatic door-opener function
- Door-opener soft-touch button
- Programmable auxiliary soft-touch button
- Soft-touch button for ringtone adjustment/ exclusion with LED indicator when excluded
- Latch function (gate opener) for checking the status of external automations

DIMENSIONS



ACCESSORIES



AGT KTA

Desktop stand. Plexiglass 10mm thick stand supplied with white RJ45 cable and terminal board cover with PMMA laminate - metallic grey

CAME