MTM VR ZAMAK & XTS 5IP

ENTRY PANEL WITH PROXIMITY READER HOUSING & DIGITAL DISPLAY

RECEIVER



Surface kit shown - includes rainshield
Phone not included.
Shown for illustrative purposes only.

CONTENTS

- Audio-video module for IP360 System
- Front piece for module with proximity reader housing* and digital display
- Frame with three module profile
- Video receiver with 5" colour LCD display




IP54 IK09 CABLE P171 DIAGRAM


KITS

Buttons/Way	Mounting	Modules	Kit Code ● Receiver	Kit Code ○ Receiver	
1 WAY	Flush	3	MTMFVRPDIP5B1	MTMFVRPDIP5W1	
	Surface		**MTMSVRPDIP5B1**	**MTMSVRPDIP5W1**	
2 WAY	Flush		MTMFVRPDIP5B2	MTMFVRPDIP5W2	
	Surface		**MTMSVRPDIP5B2**	**MTMSVRPDIP5W2**	
3 WAY	Flush		MTMFVRPDIP5B3	MTMFVRPDIP5W3	
	Surface		**MTMSVRPDIP5B3**	**MTMSVRPDIP5W3**	
4 WAY	Flush		MTMFVRPDIP5B4	MTMFVRPDIP5W4	
	Surface		**MTMSVRPDIP5B4**	**MTMSVRPDIP5W4**	
5 WAY	Flush		MTMFVRPDIP5B5	MTMFVRPDIP5W5	
	Surface		**MTMSVRPDIP5B5**	**MTMSVRPDIP5W5**	
6 WAY	Flush		MTMFVRPDIP5B6	MTMFVRPDIP5W6	
	Surface		**MTMSVRPDIP5B6**	**MTMSVRPDIP5W6**	
7 WAY	Flush		MTMFVRPDIP5B7	MTMFVRPDIP5W7	
	Surface		**MTMSVRPDIP5B7**	**MTMSVRPDIP5W7**	
8 WAY	Flush		MTMFVRPDIP5B8	MTMFVRPDIP5W8	
	Surface		**MTMSVRPDIP5B8**	**MTMSVRPDIP5W8**	
9 WAY	Flush		MTMFVRPDIP5B9	MTMFVRPDIP5W9	
	Surface		**MTMSVRPDIP5B9**	**MTMSVRPDIP5W9**	
10 WAY	Flush		MTMFVRPDIP5B10	MTMFVRPDIP5W10	
	Surface		**MTMSVRPDIP5B10**	**MTMSVRPDIP5W10**	

Item	Description	Code ● Receiver	Code ○ Receiver	
XTS 5 B/W	Full touch video intercom	**XTS/5IP BK**	**XTS/5IP WH**	



FLUSH KITS
Include back box.




SURFACE KITS
Include rainshield.




COLOURS
Available in black and white

*Reader not included. Accepts most manufacturers panel mount proximity readers.







MTM VR

THE RANGE OF EXTERNAL MODULAR ENTRY PANELS

COMPATIBLE SYSTEMS



DIGITAL DIALING

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users, a scrolling list or an alphabetical block search.

BUTTON COMPOSITION

On the call module, you can customise the amount of buttons required. Using a variety of modular front plates you can achieve maximum button composition flexibility. Available with 2, 3, 4 and 8 button front plates.


ACCESS CONTROL

The MTM range also includes 2 modules specifically for access control, one that is keypad operated and the other RDIF reader operated. Both modules are fitted with 2 on-board relay switches and 2 inputs for directly activating the relay switches.

A key feature of MTM VR is the durability and strength of the materials. The modular entry panel does not go unnoticed. It uses the same electronic modules and easy to fit functionality as the standard MTM however, it uses an IK09 rated vandal resistant Zamak composite with crush proof buttons and anti-tamper screws.

IK09


VISUAL ANGLE

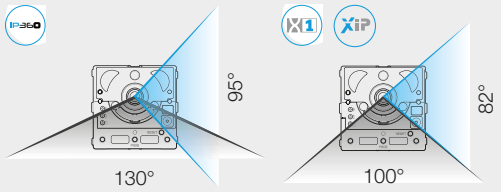

FEATURES

- Zamak finish
- Direct connection to an analogue camera (X1 audio)
- High efficiency illuminator with anti-glare diffuser
- Sound and visual alerts
- HD resolution and High Dynamic Range (HDR) technology
- Blue or white backlit tag holders with brightness settings
- MiniUSB front panel for firmware updating and programming
- Up to 98 button calls and unlimited digital calls

DIMENSIONS

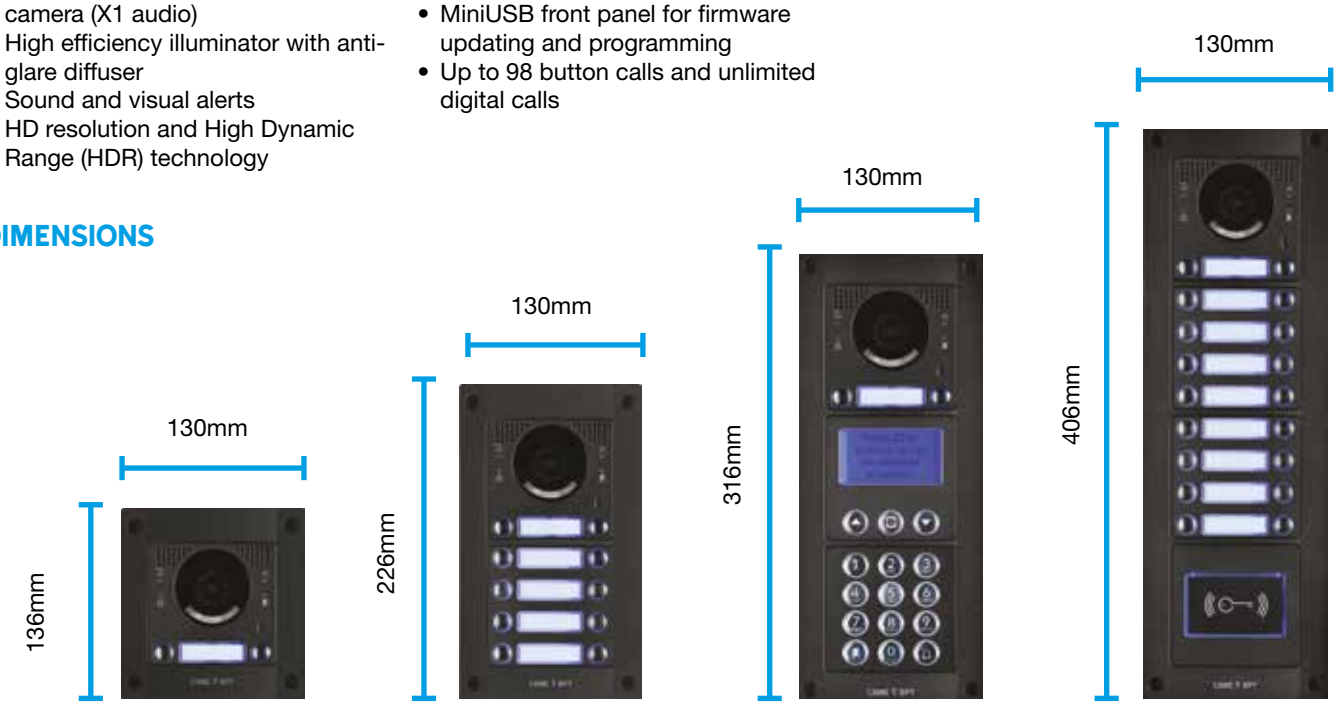

CAME

XTS/5IP WH

HANDSFREE 5" VIDEO ENTRY SYSTEM FOR IP360 SYSTEMS. WHITE.

COMPATIBLE SYSTEMS

IP360



TECHNICAL DATA


Dimensions (mm)	138 x 98 x 24
Local power supply (V)	14 ÷ 18 DC
PoE power supply	IEEE 802.3af-PD
Consumption in stand-by mode (mA)	270
Max. absorption (mA)	330
Operating temperature (°C)	0 ÷ +40
Protection rating (IP)	30
Video standard	H.264
Colour	White

Surface mounted monitor with 5˝ TFT touch screen display with Optical Bonding technology. User interface for managing video intercom functions, intercom calls, video-messaging, and text messaging. It uses SIP protocol and G711 audio codec and H.264 video codec. RJ45 port for network, PoE or local connection. On-board web server for configuring and updating firmware. It includes bracket for surface mounting on 503 box (horizontal) and Ø 60 mm round box. Ready for flush mounting with dedicated box. Compatible with IP360 system.

FEATURES

- Full-duplex audio speakerphone
- 5˝ TFT display Full touch-screen with Optical Bonding anti-glare technology for enhanced readability in brightly lit settings
- RJ45 port for directly connecting to the Ethernet
- Local or PoE (Powered over Ethernet) power supply
- Customizable user interface with UI Creator software
- Configurable quick controls (default main entrance door-opener)
- List of AUX commands for activating auxiliary functions
- “Panic” function for emergency calls to the porter (if present on the system)
- Audio video settings: ringtone volume, display brightness, interface backgrounds
- Different ringtones for entry panels and landings
- Exclude ringtone key (the alert LED lights up when silenced)
- Self-inserting video of entry panels with cyclic selection
- Unlimited calls to other receivers and smartphones and tablets
- Contacts list and favorites list
- Video answering service, stores up to 100, 10-second audio and video messages.
- Audio and video recording during conversations
- Sending and receiving text messages from the porter
- Live feeds of the connected IP video cameras
- Business function: for automatic door opening during business hours
- Block display function for cleaning
- Standard SIP protocol, H.264 video codec, G711 audio codec
- On-board web server for configuring and managing via the browser

DIMENSIONS

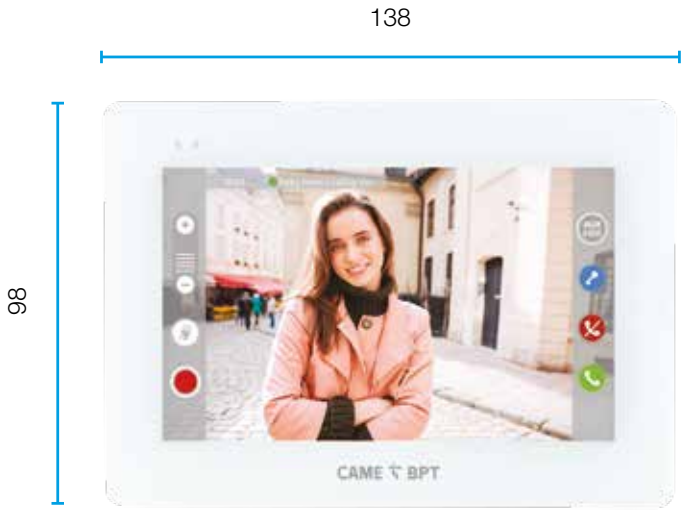

CAME