VRM & AGT

ENTRY PANEL WITH PROXIMITY READER HOUSING

RECEIVER



Surface kit shown - includes rainshield

CONTENTS

- Audio-video module for X1 System
- One piece faceplate with one to ten buttons and proximity reader housing*
- Frame with tthree- or four-module profile
- X1 control module and power supply
- Video receiver with handset
- Maximum cable distance 100m

IP54 IK09 CABLE P170 DIAGRAM 2


KITS

Buttons/Way	Mounting	Modules	Kit Code	
1 WAY	Flush	3	VRMFPAGV1	
	Surface		**VRMSPAGV1**	
2 WAY	Flush		VRMFPAGV2	
	Surface		**VRMSPAGV2**	
3 WAY	Flush		VRMFPAGV3	
	Surface		**VRMSPAGV3**	
4 WAY	Flush		VRMFPAGV4	
	Surface		**VRMSPAGV4**	
5 WAY	Flush		VRMFPAGV5	
	Surface		**VRMSPAGV5**	
6 WAY	Flush		VRMFPAGV6	
	Surface		**VRMSPAGV6**	
7 WAY	Flush	4	VRMFPAGV7	
	Surface		**VRMSPAGV7**	
8 WAY	Flush		VRMFPAGV8	
	Surface		**VRMSPAGV8**	
9 WAY	Flush		VRMFPAGV9	
	Surface		**VRMSPAGV9**	
10 WAY	Flush		VRMFPAGV10	
	Surface		**VRMSPAGV10**	


Item	Description	Code	
AGT Video	Intercom video handset	**AGT V (840CF-0020)**	

LASER ENGRAVING
Customised laser engraving requires up to 5 days lead time (maximum).





SURFACE KITS
Include rainshield.




FLUSH KITS
Include back box.

*Reader not included. Accepts most manufacturers panel mount proximity readers.







VRM

FLAT PLATE WITH UK MANUFACTURED BUTTONS

COMPATIBLE SYSTEMS

X1 · XiP · IP360 · GSM · 200







DIGITAL DIALING

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users, a scrolling list or an alphabetical block search.

PUSH BUTTON COMPOSITION

On the call module, you can customise the amount of buttons required. Using UK manufactured push buttons, you can achieve maximum button composition flexibility.

ACCESS CONTROL


The VRM range can accommodate the MTM VR keypad unit for standalone access control as well as the unique 'Universal reader bracket' able to house most types of common proximity access control reader.

A key feature of VRM is the durability and strength of the materials. It uses the same electronic modules and easy to fit functionality as the standard MTM however, it uses an IK09 rated vandal resistant marine grade stainless steel manufactured in the UK.

Vandal resistant entry panels are available in a number of finishes such as Stainless Steel, Highly Polished Steel, Brass and can be custom powder coated in any RAL colour of your choice.

IK09

VISUAL ANGLE

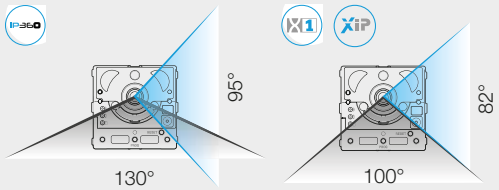


FEATURES

The benefits of MTM VR plus:

- Bespoke finishes
- Laser engraving
- Unmatched video quality
- IP65 rated bespoke buttons
- Manufactured in the UK
- Impact & water resistant
- Custom sizes

DIMENSIONS

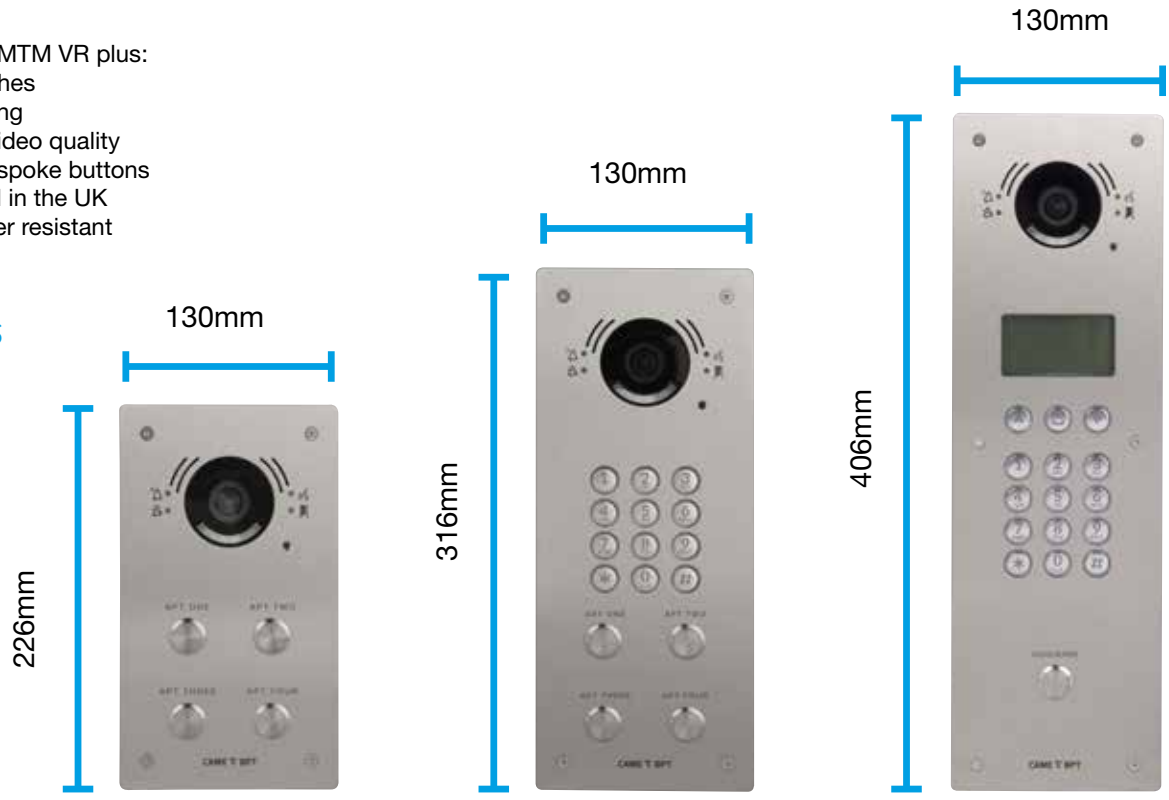

AGT V

HANDSET VIDEO INTERCOM WITH SOFT-TOUCH BUTTONS, 5" LCD DISPLAY, WHITE

COMPATIBLE SYSTEMS



TECHNICAL DATA

Dimensions (mm)	205 x 190 x 44.5
Power supply by BUS (V)	15 ÷ 20 DC
Absorption by BUS (mA)	175
Consumption in stand-by mode (mA)	<1
Operating temperature (°C)	+5 ÷ +40
Protection rating (IP)	30
Video standard	PAL/NTSC
Display	5" TFT LCD
Colour	White

Wall monitor with 5″ colour LCD display equipped with OSD for adjusting video parameters (brightness, colour, contrast). The 4 main touch buttons are used to manage the primary functions such as door opening, self-insertion of entry panel videos, ringtone adjustment/exclusion (with signaling LED when excluded) and the sending of a programmable auxiliary control. It allows manging the "gate opener" function and displays the status of the gate controlled by means of a signaling LED. It includes a bracket for wall mounting on horizontal or vertical 503 box and on Ø60 mm round box.

FEATURES

- 5" color display with OSD
- Handset with magnetic hang-up
- Concealed LED signal
- Soft-touch buttons
- Program melodies depending on the type of call
- Display colour, brightness and contrast adjustment via OSD
- Adjust/exclude ringtone, with alert LED when set to exclude mode
- UX2 for auxiliary functions and call to the porter
- Latch function (gate opener) for checking the status of external automations
- Automatic door-opener function

ACCESSORIES



AGT KTV

Desktop stand. Plexiglass 10mm thick stand supplied with white RJ45 cable and terminal board cover with PMMA laminate - metallic grey

DIMENSIONS





CAME