VRM & XTS 7IP

ENTRY PANEL WITH PROXIMITY READER HOUSING & DIGITAL DISPLAY

RECEIVER

WiFi COMPATIBLE



Surface kit shown - includes rainshield
Phone not included.
Shown for illustrative purposes only.

CONTENTS


- Audio-video module for IP360 System
- One piece faceplate with one to ten buttons and proximity reader housing*
- Frame with three- or four-module profile
- Video receiver with 7” colour LCD display
- Video call via app to 4 iOS or Android devices

IP54 IK09 CABLE P171 DIAGRAM


KITS

Buttons/Way	Mounting	Modules	Kit Code ● Receiver	Kit Code ○ Receiver	
1 WAY	Flush	3	VRMFPDIP7B1	VRMFPDIP7W1	
	Surface		**VRMSPDIP7B1**	**VRMSPDIP7W1**	
2 WAY	Flush		VRMFPDIP7B2	VRMFPDIP7W2	
	Surface		**VRMSPDIP7B2**	**VRMSPDIP7W2**	
3 WAY	Flush		VRMFPDIP7B3	VRMFPDIP7W3	
	Surface		**VRMSPDIP7B3**	**VRMSPDIP7W3**	
4 WAY	Flush		VRMFPDIP7B4	VRMFPDIP7W4	
	Surface		**VRMSPDIP7B4**	**VRMSPDIP7W4**	
5 WAY	Flush		VRMFPDIP7B5	VRMFPDIP7W5	
	Surface		**VRMSPDIP7B5**	**VRMSPDIP7W5**	
6 WAY	Flush		VRMFPDIP7B6	VRMFPDIP7W6	
	Surface		**VRMSPDIP7B6**	**VRMSPDIP7W6**	
7 WAY	Flush	4	VRMFPDIP7B7	VRMFPDIP7W7	
	Surface		**VRMSPDIP7B7**	**VRMSPDIP7W7**	
8 WAY	Flush		VRMFPDIP7B8	VRMFPDIP7W8	
	Surface		**VRMSPDIP7B8**	**VRMSPDIP7W8**	
9 WAY	Flush		VRMFPDIP7B9	VRMFPDIP7W9	
	Surface		**VRMSPDIP7B9**	**VRMSPDIP7W9**	
10 WAY	Flush		VRMFPDIP7B10	VRMFPDIP7W10	
	Surface		**VRMSPDIP7B10**	**VRMSPDIP7W10**	

Item	Description	Code ● Receiver	Code ○ Receiver	
XTS 7 B/W	Full touch video intercom	**XTS/7IP BK WIFI**	**XTS/7IP WH WIFI**	



FLUSH KITS
Include back box.




SURFACE KITS
Include rainshield.




COLOURS
Available in black and white

*Reader not included. Accepts most manufacturers panel mount proximity readers.







VRM

FLAT PLATE WITH UK MANUFACTURED BUTTONS

COMPATIBLE SYSTEMS

X1 · XiP · IP360 · GSM · 200







DIGITAL DIALING

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users, a scrolling list or an alphabetical block search.

PUSH BUTTON COMPOSITION

On the call module, you can customise the amount of buttons required. Using UK manufactured push buttons, you can achieve maximum button composition flexibility.

ACCESS CONTROL


The VRM range can accommodate the MTM VR keypad unit for standalone access control as well as the unique 'Universal reader bracket' able to house most types of common proximity access control reader.

A key feature of VRM is the durability and strength of the materials. It uses the same electronic modules and easy to fit functionality as the standard MTM however, it uses an IK09 rated vandal resistant marine grade stainless steel manufactured in the UK.

Vandal resistant entry panels are available in a number of finishes such as Stainless Steel, Highly Polished Steel, Brass and can be custom powder coated in any RAL colour of your choice.

IK09

VISUAL ANGLE

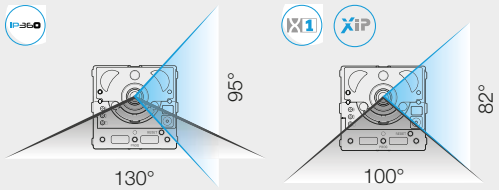


FEATURES

The benefits of MTM VR plus:

- Bespoke finishes
- Laser engraving
- Unmatched video quality
- IP65 rated bespoke buttons
- Manufactured in the UK
- Impact & water resistant
- Custom sizes

DIMENSIONS

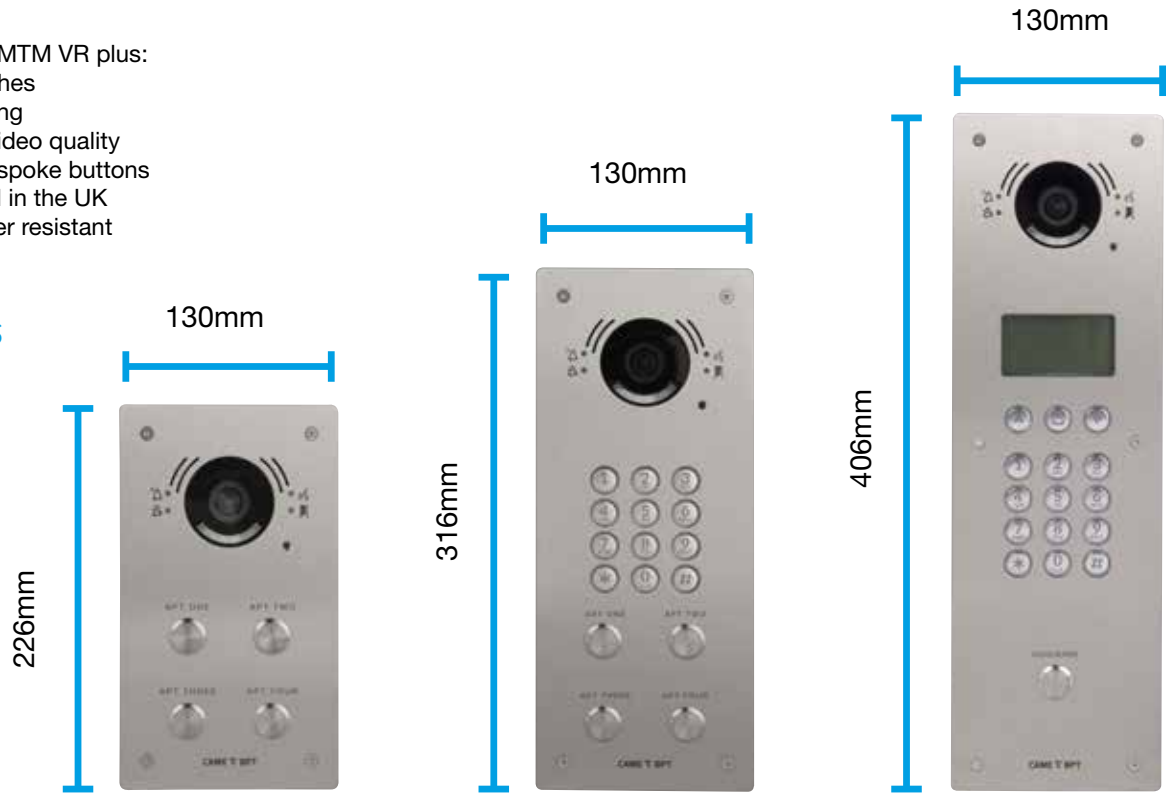

XTS 7 IP BK WIFI

HANDSFREE 7" VIDEO ENTRY SYSTEM FOR IP360 SYSTEMS. BLACK.

COMPATIBLE SYSTEMS

IP360



TECHNICAL DATA


Dimensions (mm)	185 x 129 x 24
Local power supply (V)	14 ÷ 18 DC
PoE power supply	IEEE 802.3af-PD
Consumption in stand-by mode (mA)	340
Max. absorption (mA)	420
Operating temperature (°C)	0 ÷ +40
Protection rating (IP)	30
Video standard	H.264
Frequency (MHz)	2.412 - 2.472
Wireless Standard	IEEE 802.11b/g/n
Colour	Black

Surface mounted monitor with 7″ TFT touch-screen display with Optical Bonding technology, integrated WiFi for remote calls on smartphones running the dedicated app. User interface for managing video intercom unctions, intercom calls, video-messaging, and text messaging. It uses SIP protocol and G711 audio codec and H.264 video codec. RJ45 port for network, PoE or local connection. On-board web server for configuring and updating firmware. It includes bracket for surface mounting on 503 box (horizontal) and Ø 60 mm round box. Ready for flush mounting with dedicated box. Compatible with IP360 system.

FEATURES

- Full-duplex audio speakerphone
- 5″ TFT display Full touch-screen with Optical Bonding anti-glare technology for enhanced readability in brightly lit settings
- RJ45 port for directly connecting to the Ethernet
- Local or PoE (Powered over Ethernet) power supply
- Customizable user interface with UI Creator software
- Configurable quick controls (default main entrance door-opener)
- List of AUX commands for activating auxiliary functions
- "Panic" function for emergency calls to the porter (if present on the system)
- Audio video settings: ringtone volume, display brightness, interface backgrounds
- Different ringtones for entry panels and landings
- Exclude ringtone key (the alert LED lights up when silenced)
- Self-inserting video of entry panels with cyclic selection
- Unlimited calls to other receivers and smartphones and tablets
- Contacts list and favorites list
- Video answering service, stores up to 100, 10-second audio and video messages.
- Audio and video recording during conversations
- Sending and receiving text messages from the porter
- Live feeds of the connected IP video cameras
- Business function: for automatic door opening during business hours
- Block display function for cleaning
- Standard SIP protocol, H.264 video codec, G711 audio codec
- On-board web server for configuring and managing via the browser

DIMENSIONS

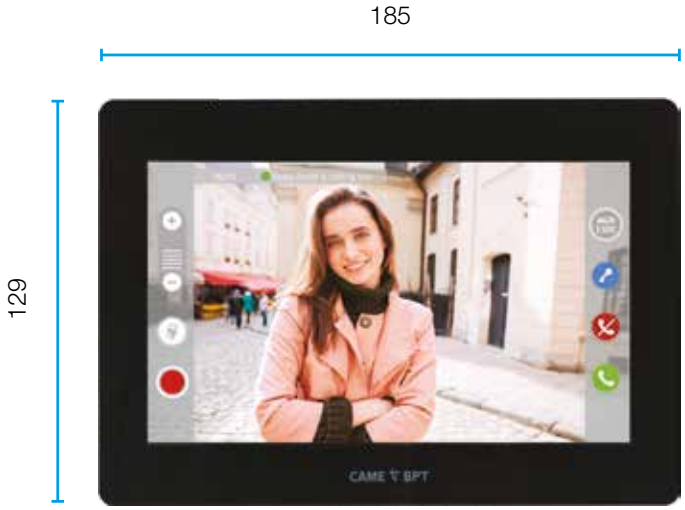

CAME