



# APEX DECK ISOLATED SYSTEM

APEX LITE FOR  
LOW & HIGH RISE  
DEVELOPMENTS


**CAME**   
**ENTROTEC**

[CAME.COM/ENTROTEC](http://CAME.COM/ENTROTEC)




# CAME ENTROTEC APEX DECK

## ISOLATED SYSTEM

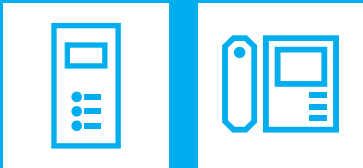

### OVERVIEW


Apex Lite is ideal for Low and High Rise developments that have multiple apartments and doors. Straight forward to install handset marshalling cabinets satisfy even the most complex audio, video or 'mix and match' door entry systems.

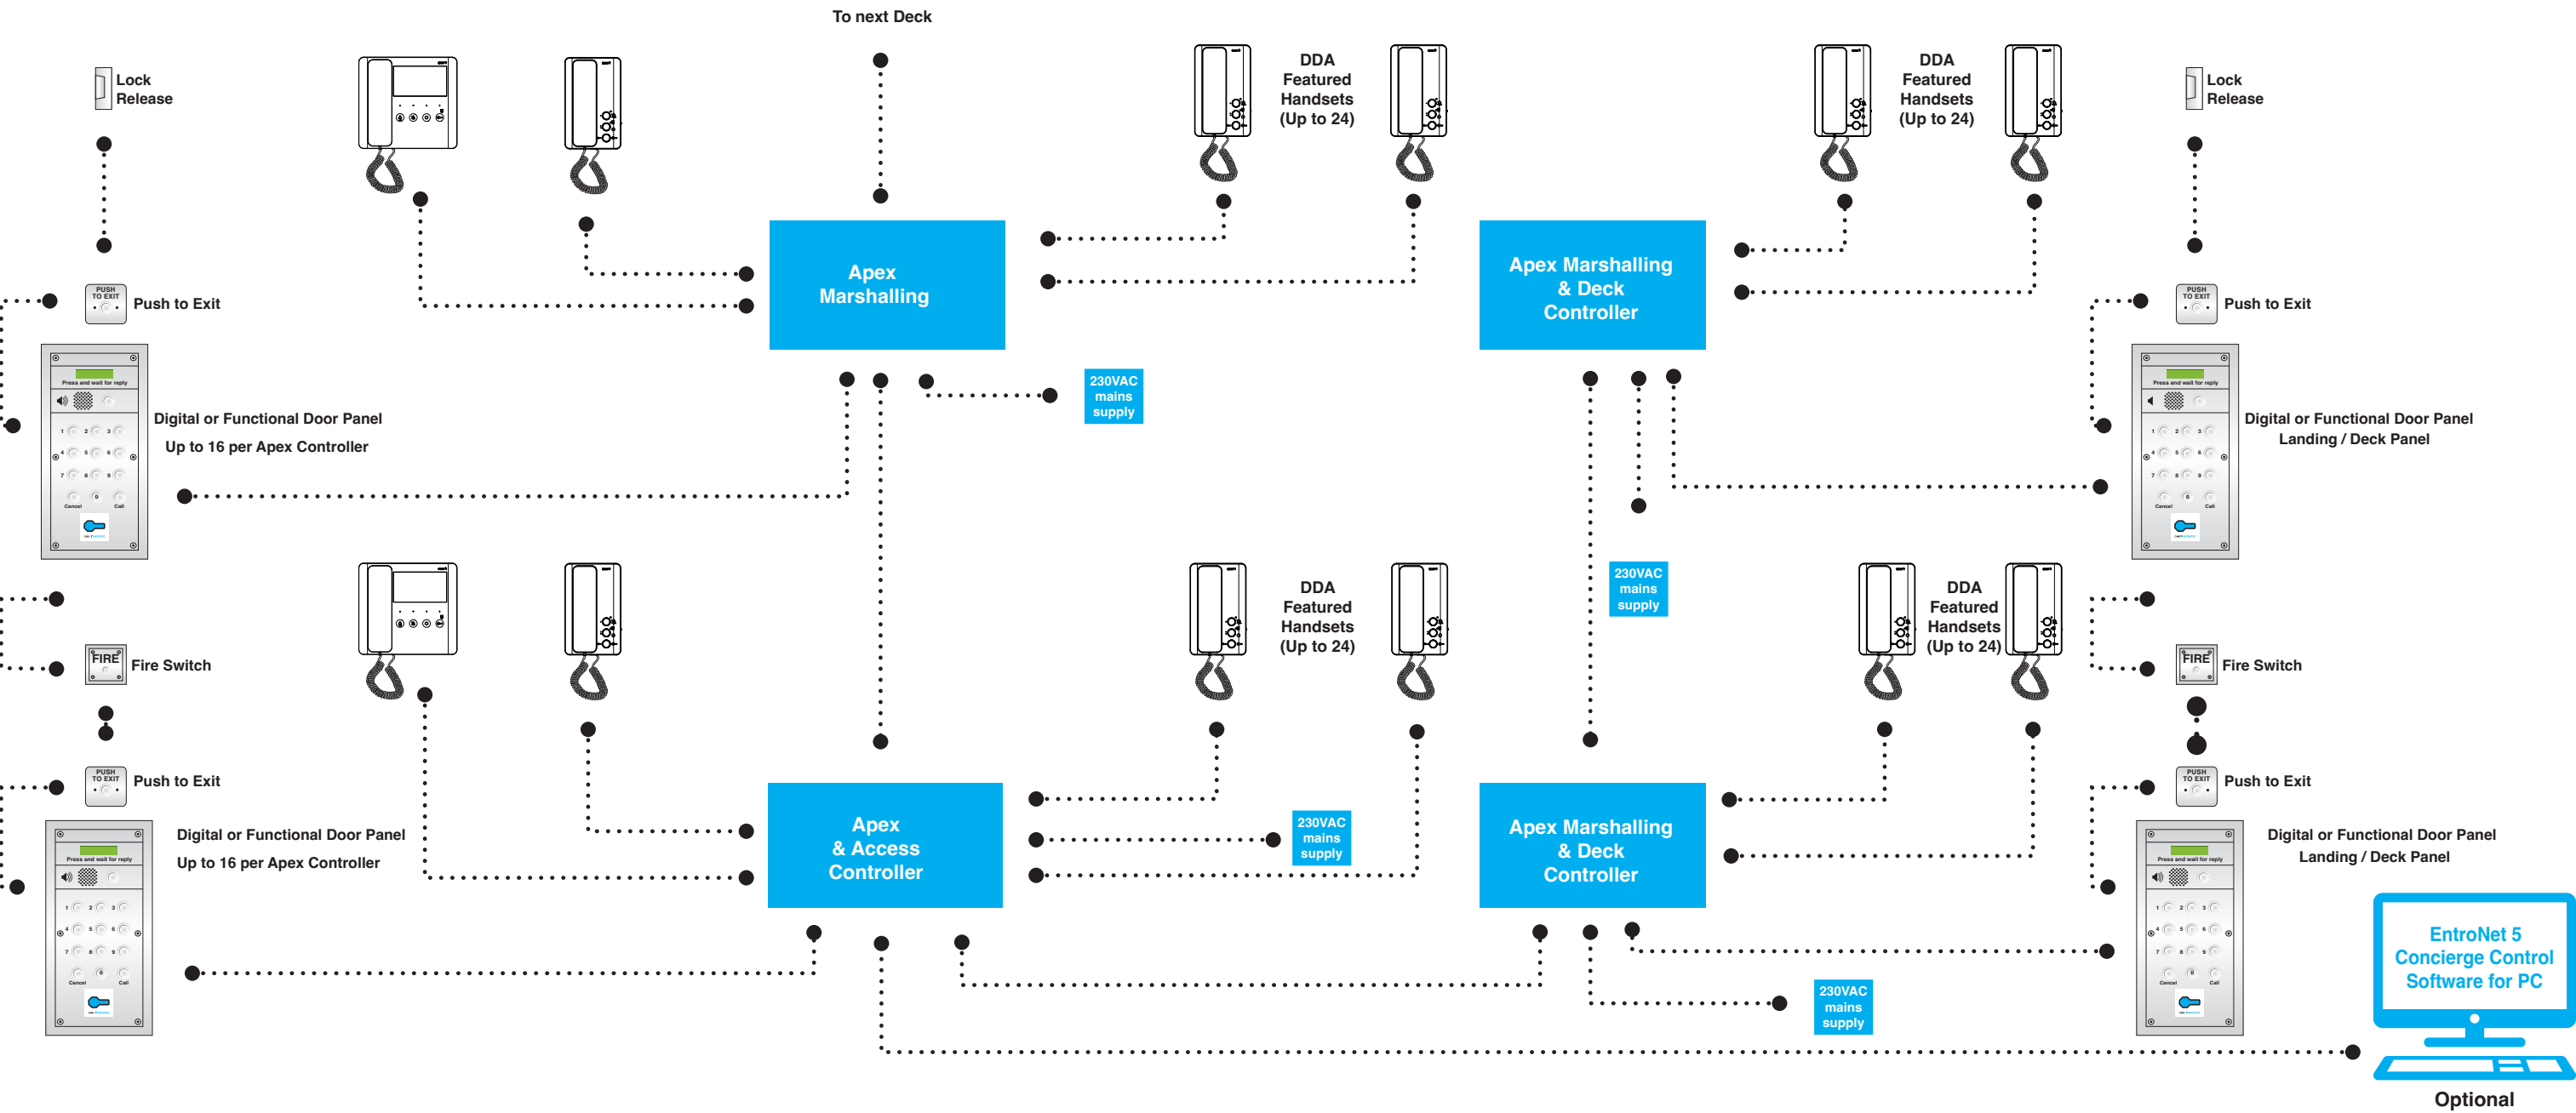



# CAME ENTROTEC APEX DECK

## ISOLATED SYSTEM

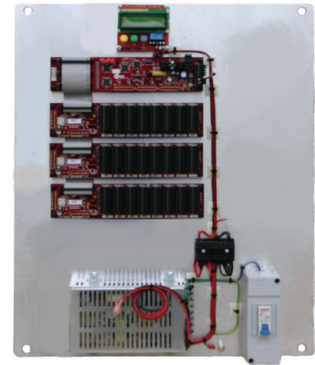

## FEATURES

- Controllers supplied in 8, 16 and 24 way formats
- Remote marshalling or deck controllers available in 8, 16 and 24 way formats
- Over 1000 digital and functional doors per system with software configurable door zoning
- Separate speech path per controller
- DC system allowing for battery back-up and DC lock releases and maglocks (fused)
- Supports CAME Entrotec ED5, ED+ and RH+ series handsets and EV5, EV and EV+ video handsets (6144 maximum)
- Full handset isolation and switch adjustable time periods for all functions
- Energy efficient Black on White LCD readout for panel(s) displaying call progress messages
- Door panels supplied with Pressure Sensitive Buttons, Vandal Resistant Buttons or Backlit Keypad
- Unlimited horizontal speech paths
- Call reassurance tones at door panels with adjustable volume
- Soft-Close (turns on lock power once door has closed)
- Auto Dial features (dials without having to press CALL button)
- Integrated coded access facility (10 codes)
- Anti-Tailgating function
- Lock release times individually adjustable between 1 and 60 seconds
- Multi-block linkable for gated access systems
- Option: EntroNet Concierge system
- Option: Integrated Proximity Access Control
- Option: Lift control system
- Option: Integrated panel camera or separate CCTV camera for video systems

## TECHNICAL DATA

- System Supply: Single phase mains 230VAC 50Hz, current rated for individual system
- System Supply Output: 13.8VDC – 18VDC, rated for individual system requirements.
- Handset Type: Audio: ED3+, ED4+, RH3+, ED5  
Video: EV, EV+, EV5
- Number of Flats: 6144 maximum (up to 24 per controller)
- Number of Entrances: Over 1000 (up to 16 per controller)
- System Controllers: Up to 256 Supplied pre-wired in high quality IP66 rated lockable steel enclosures
- Door Panel: 2.5mm thick 316 “Marine” grade stainless steel  
Type 23 “Compact” panel for functional panels up to 8 flats with Trades  
Type 23 “Compact” panel for digital panels with Backlit Keypad  
Type 17 panel for functional panels up to 12 flats with Trades

### CAME ENTROTEC

5 Ashwood Court  
Oakbank  
Livingston  
EH53 0TL

Tel: 01506 886230

Support: 01506 886235

# CAME ENTROTEC