


RELAY

Multipurpose Relay (Untimed)

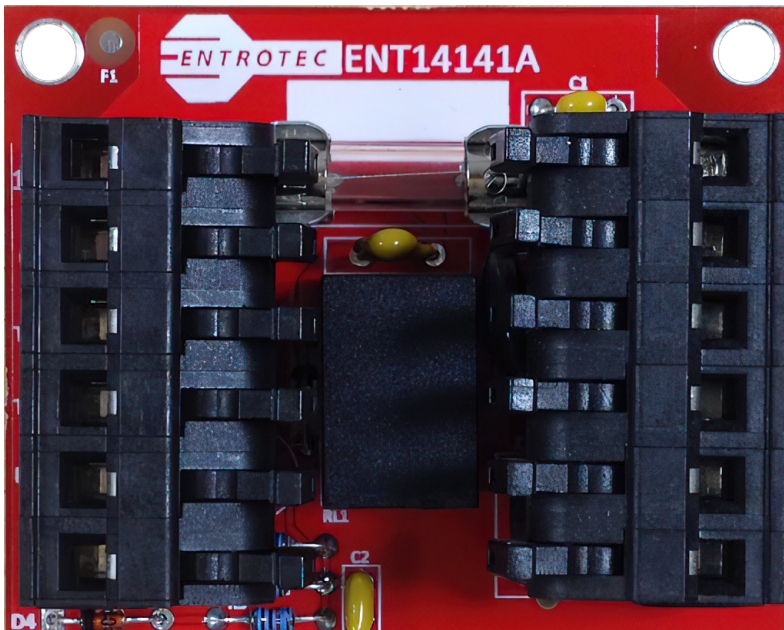

Overview

- Single Pole Changeover Relay
- Positive or Negative Trigger
- Low Battery Dropout Function
- Volt-Free Connections
- Fused Power Output
- Easy Installation
- Panel or Chassis Mountable

Technical characteristics

Nominal Coil Voltage	12V DC
Max Switch Capacity	1A @ 24VDC, 1A @ 120VAC
Power	35mA active at 13.8VDC, 3mA quiescent at 13.8VDC
Temp. Range	-25 C to +70 C
Life	1,000,000 Mechanical Operations
Operation Time	Max 5ms to Operate / Release
Dimensions	55mm Height, 55mm Width, 25mm Depth