



1 OVERVIEW


1.1 WHAT'S INCLUDED

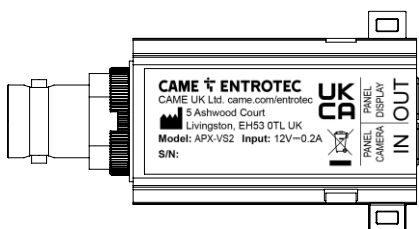

1x **APX-VS2**
2-Channel Video Switcher / Sequencer



1x **CABLE ASSEMBLY**
Connects to Call Panel (supplied separately)

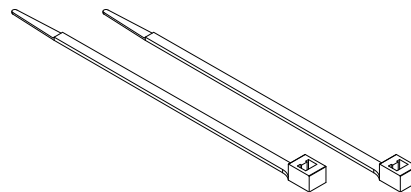

2x **CABLE TIES**
(For affixing device cable and strain relief)


1.2 INTENDED USE

The APX-VS2 is an accessory for a Call Panel that forms part of an APX video intercom system. The APX-VS2 should be fitted in-line between the Call Panel mount camera and Call Panel display board, providing an additional BNC input from a secondary camera, such as an external dome camera.

1.3 CONNECTIONS



2 INSTALLATION

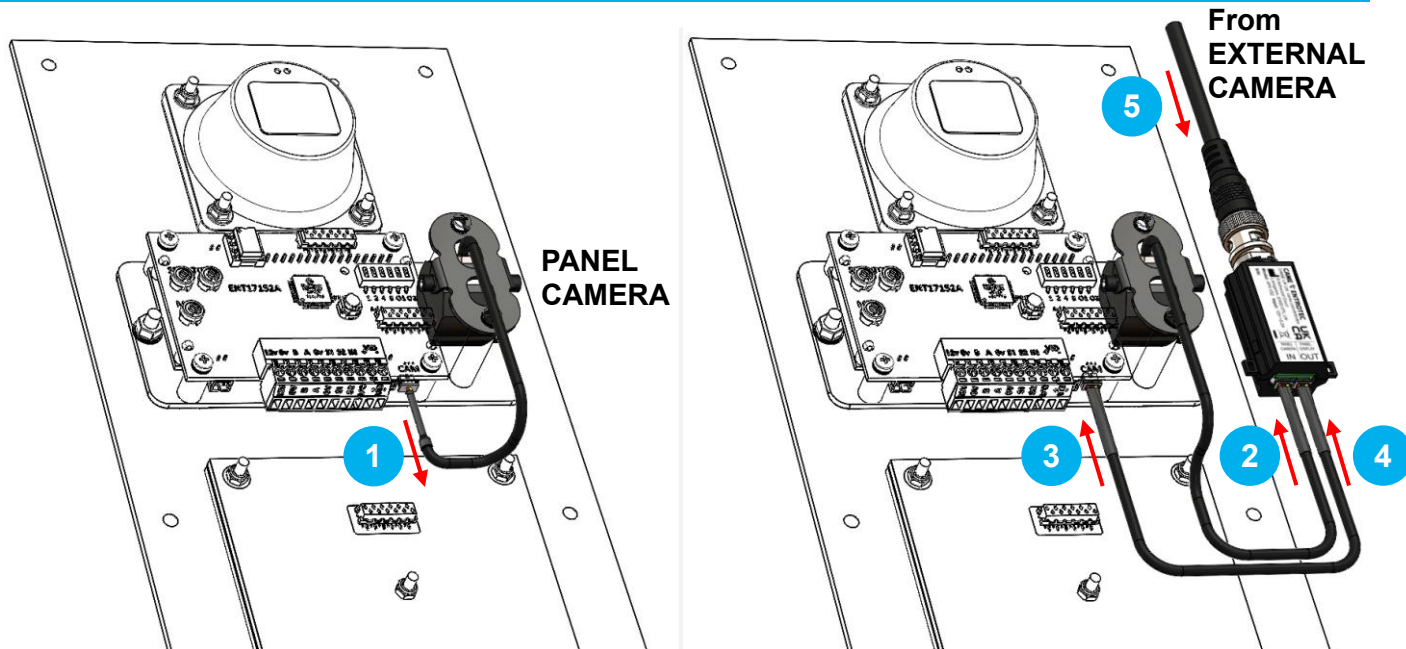

1. Disconnect the **PANEL CAMERA** from 'CAM' connection on the Display Board.
2. Connect the **PANEL CAMERA** to the 'IN' connection on the **APX-VS2**.
3. Connect the **CABLE ASSEMBLY** to 'CAM' connection on the Display Board.
4. Connect the other end of the **CABLE ASSEMBLY** to 'IN' connection on the **APX-VS2**.
5. Connect the RG59 Cable (BNC plug) from **EXTERNAL CAMERA** to the BNC Jack on the on the **APX-VS2**.