



1 OVERVIEW

1.1 WHAT'S INCLUDED



1x BNC CABLE ASSEMBLY

Connects to Call Panel (supplied separately)

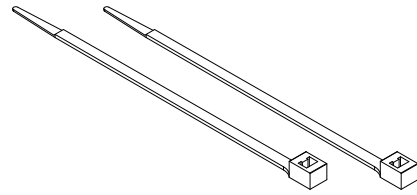

2x CABLE TIES


(For cable strain relief)

1.2 INTENDED USE

The CAB-APX-VRD is an accessory kit for a call panel that forms part of an APX video intercom system. The **BNC CABLE ASSEMBLY** is fitted at the call panel display board, providing a BNC video input for an external camera, such as a dome camera.

1.3 BNC CABLE ASSEMBLY CONNECTIONS


EXTERNAL
CAMERA




CALL
PANEL

2 INSTALLATION

TYPICAL EXTERNAL CAMERA CONNECTIONS

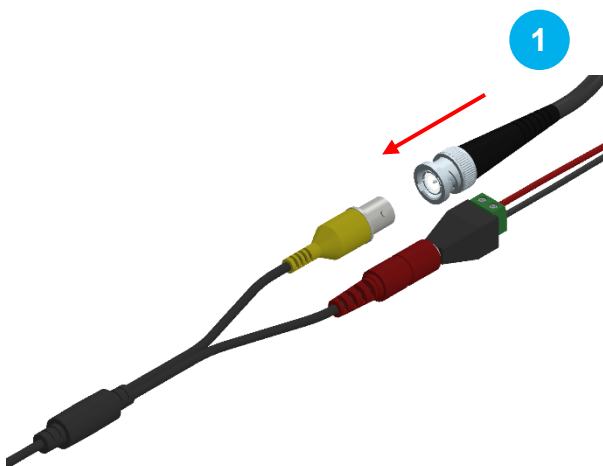

CALL PANEL CONNECTIONS

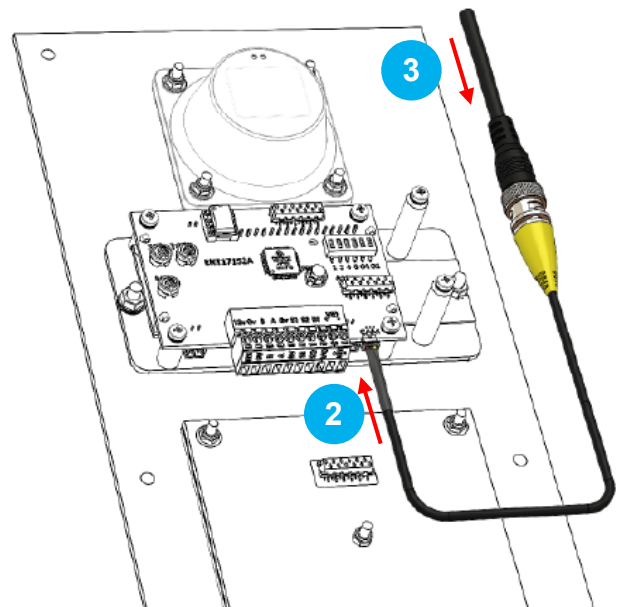

1. Connect RG59 Coax Cable with BNC (male) to the output of the **EXTERNAL CAMERA**.
2. Connect the **BNC CABLE ASSEMBLY** to 'CAM' connection on the Display Board.
3. Connect RG59 Coax Cable with BNC from **EXTERNAL CAMERA** to the **BNC CABLE ASSEMBLY**.

NOTES

External cameras can be powered from the call panels DC power connection (**12V - 0V**), up to 500mA. Use a BNC connector with an insulating shroud or cover with insulating tape.