


RADIO RECEIVER

RADIO RECEIVER BOXED WITH ABS IP56 ENCLOSURE

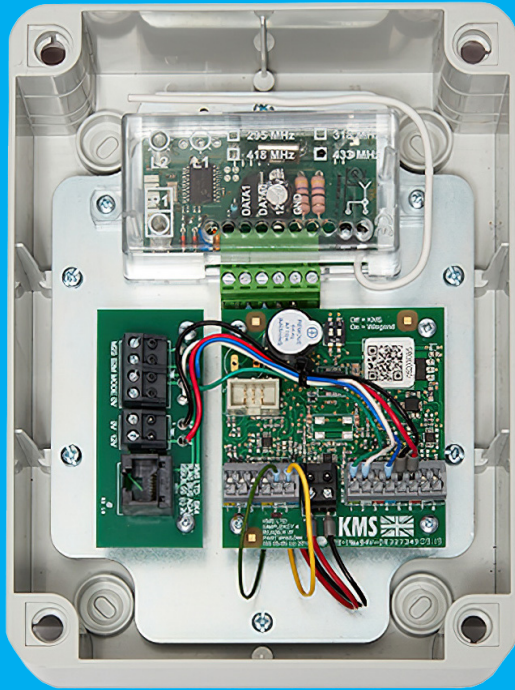

26 bit SELW-R433 Wiegand receiver allows use of radio transmitters for connection to online access control systems.

Compatible with all SimpleKey 3 and Simplekey 4 controllers

Transmitters available in single, double, and quadruple button variants

Utilises 1x reader channel

Can be used alongside standard proximity readers


INSTALLATION

- Optional tuned antenna
- Up to 100m range in open field
- Single Channel wiegand output
- Surface mounting
- Can be supplied in IP56 rated plastic enclosure

PRODUCT INFORMATION

- Operating temperature: -20°C to 70°C
- Material: Polycarbonate housing
- Wiegand: 26 bits
- Frequency: 433 MHz
- Encoding: KeeLoq rolling code
- Operating voltage: 12/24V AC/DC
- Max current: 24mA

DIMENSIONS

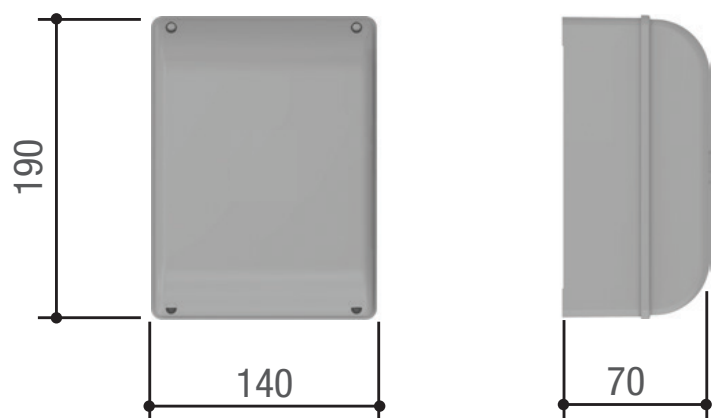

PRODUCT CODE: 66800

CAME KMS

A2 Glory Park, Glory Park Avenue, Wooburn Green HP10 0DF
Tel: 01494 531099 Email: ckuk.info@came.com

CAME  **KMS**